

WAAS CH 90199 W28A	APP CRS 288°	Rwy Ldg TDZE 341 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 28

CAPE GIRARDEAU RGNL (CGI)

RNP APCH - GPS.

▼


⚠

When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 771 feet and all visibilities 1/2 SM. Increase LNAV/VNAV DA to 896 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cats C/D 1/4 SM. VDP NA when using Cairo Rgnl altimeter setting. Rwy 28 helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase LPV Cat A/B visibility to 1 1/2 SM. Inop table does not apply to LNAV/VNAV all Cats. For inop ALS when using Cairo altimeter setting, increase LPV Cat A/B visibility to 1 1/2 SM. Baro-VNAV NA.

ODALS

MISSED APPROACH:
Climb to 3000 direct
IYIGO and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

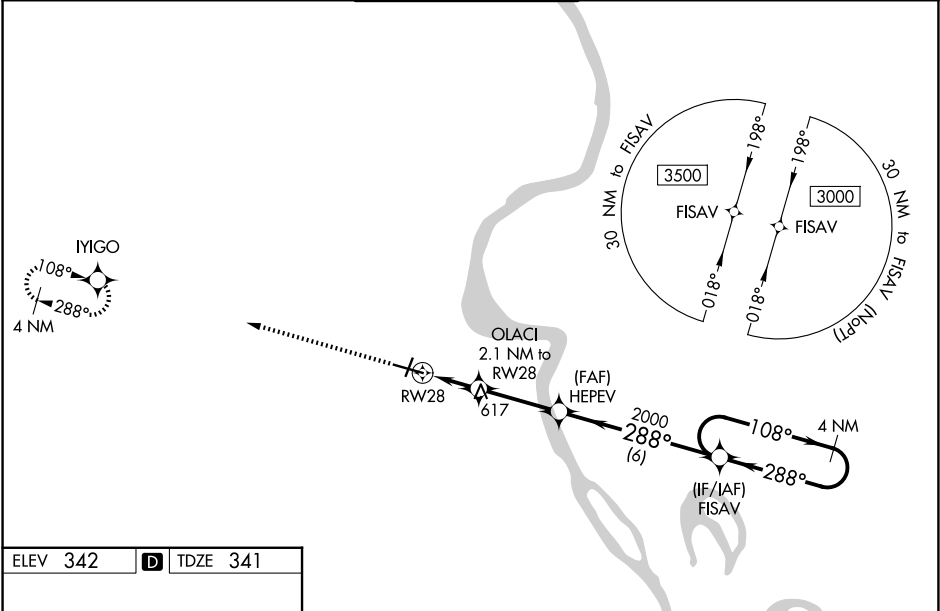

ELEV 342 **D** TDZE 341

MIRL Rwy 2-20 **0**
HIRL Rwy 10-28 **0**

3000 ↑		YIGYO ✦		OLACI 2.1 NM to RW28		HEPEV 2000		FISAV		4 NM Holding Pattern	
1.6 NM to RW28 ↙		1.6 NM to RW28 ↓		1040		2000		288°		108° → ← 288° 3000	
1.6 NM		0.5 NM		3 NM		6 NM				GP 3.00° TCH 38	
CATEGORY		A		B		C		D			
LPV DA				723-1		382 (400-1)					
LNAV/VNAV DA				848-1 ³ / ₈		507 (600-1 ³ / ₈)					
LNAV MDA		880- ³ / ₄		539 (600- ³ / ₄)		880-1 ³ / ₈		539 (600-1 ³ / ₈)			
CIRCLING		880-1 538 (600-1)		960-1 618 (700-1)		1000-1 ³ / ₄ 658 (700-1 ³ / ₄)		1080-2 ¹ / ₄ 738 (800-2 ¹ / ₄)			

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026