

LOC/DME I-MVP 111.55 Chan 52 (Y)	APP CRS 196°	Rwy Ldg 7302 TDZE 1320 Apt Elev 1333
--	------------------------	---


ILS or LOC RWY 19L
WICHITA DWIGHT D EISENHOWER NTL (ICT)

A ADF required. Simultaneous approach authorized with ILS or LOC RWY 19R. For inoperative MALS, increase S-ILS 19L Cat E visibility to ¾ mile, S-LOC 19L Cat E visibility to 1 ½ mile, NUMAE fix minimums: S-LOC 19L Cat C/D/E visibility to 1 mile.

MALS

MISSED APPROACH: Climb to 3000 direct PICHE LOM and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

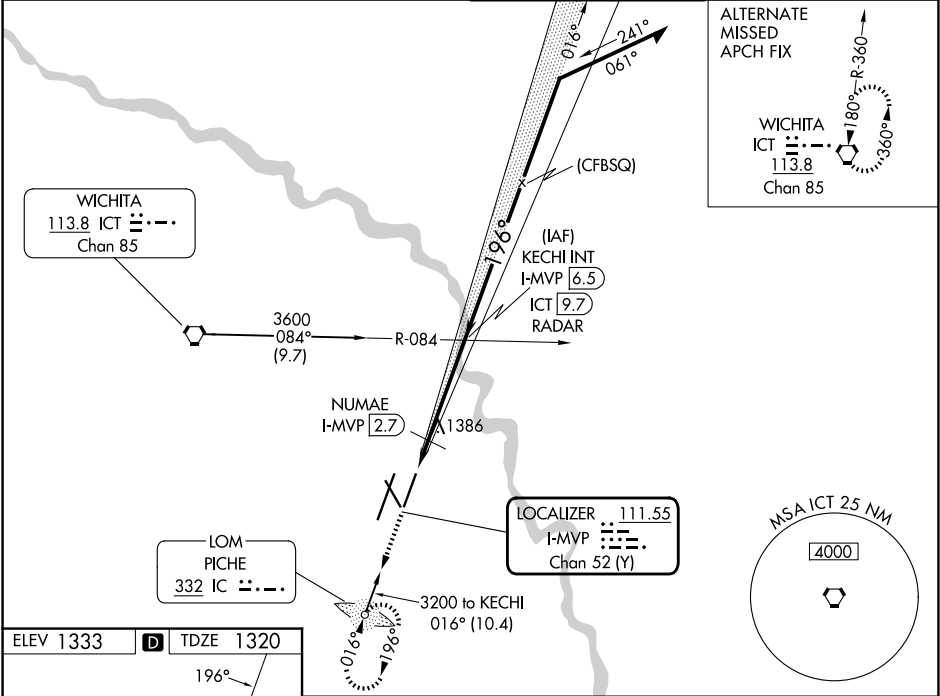

ELEV 1333 D TDZE 1320

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

3000 IC		KECHI INT I-MVP 6.5 / RADAR		Remain within 15 NM	
*LOC only. I-MVP 1.4		NUMAE I-MVP 2.7	3000	016°	3200
		1780*	3000	196°	3000
		1.3 NM	3.8 NM	GS 3.00° TCH 54	
CATEGORY	A	B	C	D	E
S-ILS 19L	1520-½ 200 (200-½)				
S-LOC 19L	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)		
CIRCLING	1800-1 467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)	2000-2¼ 667 (700-2¼)
NUMAE FIX MINIMUMS (DME REQUIRED)					
S-LOC 19L	1700-½ 380 (400-½)		1700-⅝ 380 (400-⅝)		
CIRCLING	1800-1 467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)	2000-2¼ 667 (700-2¼)

NC-2, 25 DEC 2025 to 22 JAN 2026

NC-2, 25 DEC 2025 to 22 JAN 2026