

RNAV (GPS) RWY 25

WAAS CH 83310 W25A	APCH CRS 252°	Rwy Idg TDZE 449 Arpt Elev 449
--	-------------------------	--


[USA]

LADD AAF (PAFB)

RNP APCH-GPS		ALSIF-1 	MISSED APPROACH: Climb to 1000 then climbing left turn to 4200 direct IMARE and hold.	
* When ALS inop, increase vis to 1½ miles. ** When ALS inop, increase CAT CD vis to 1½ miles. *** Circling not authorized N of Rwy 7-25.				
ATIS 134.25	FAIRBANKS APP CON 127.1 251.1 360° - 179° 125.35 363.2 180° - 359°	TOWER★ 125.0 (CTAF) 0 284.6	GND CON 121.7 263.15	ASR/PAR

Procedure NA for arrivals at FIBEX on V301 southwest bound and at IMARE on V444 east bound.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

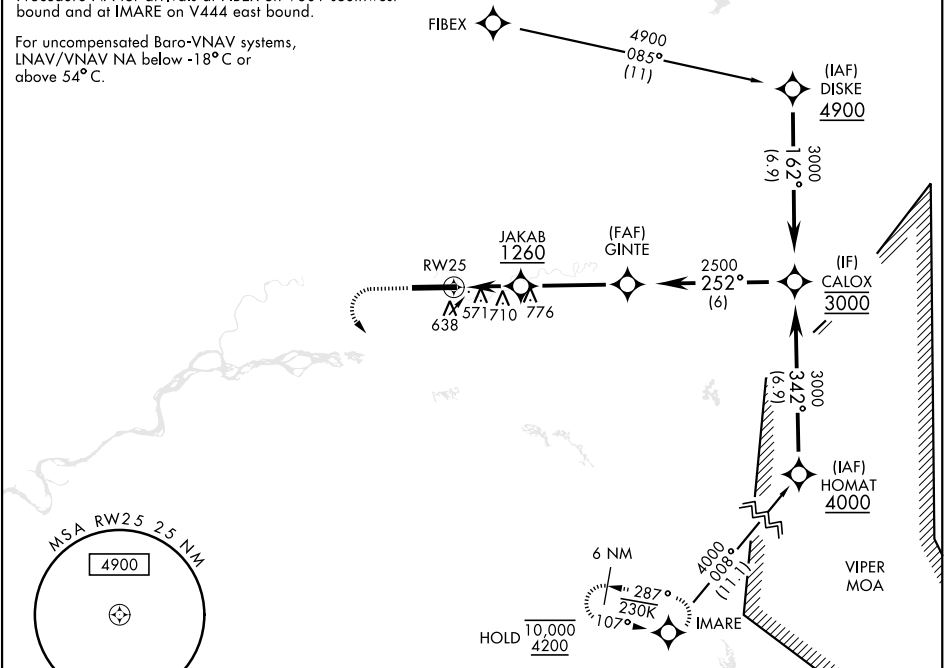

						VGSI and descent angles not coincident (VGSI angle 3.30/TCH 67).		CALOX	
		JAKAB		GINTE		2500		3000	
1.38 NM to RW25		1260		252°		2500		3000	
RW25		1260		252°		2500		3000	
2.4 NM		3.9 NM							
CATEGORY	A		B		C		D		
LPV DA	649-1		200		(200-1)				
LNAV/VNAV DA*	853-1		404		(500-1)				
LNAV MDA**	1000-1	551	(600-1)		1000-1½	551	(600-1½)		
CIRCLING***	1000-1	1040-1	1080-1¾		1160-2¼				
	551 (600-1)	591 (600-1)	631 (700-1¾)		711 (800-2¼)				

ELEV 449

TDZE 449

† A1

TWR

8575 X 150

25

538

252°

† A1

HIRL Rwy 7-25

† ALS non-standard

RNAV (GPS) RWY 25