


ILS or LOC RWY 6L
GUAM INTL (GUM)(PGUM)

MALSR


ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
---------------	---------------------------	----------------------------	------------------------

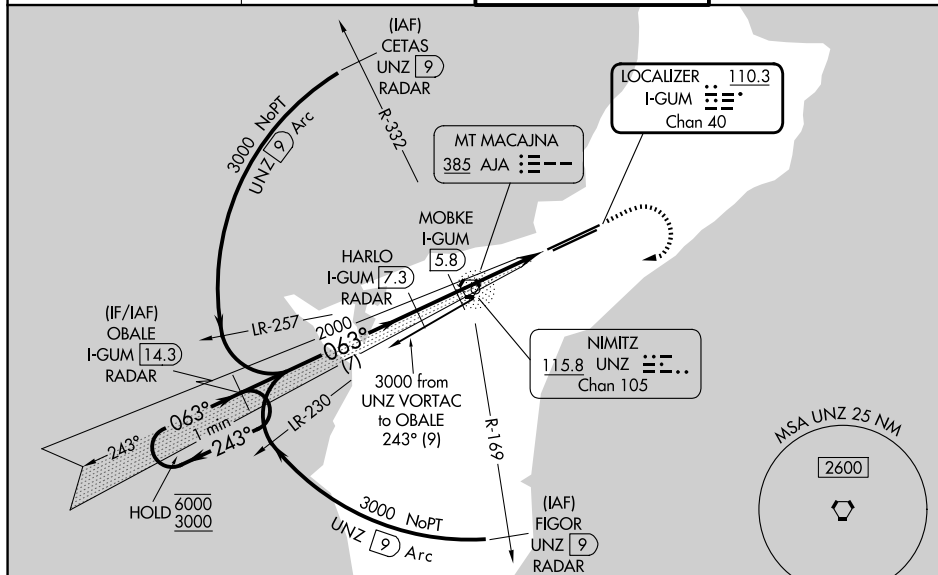


2100 ↑	3000 ↗	UNZ 	I-GUM SW crs	OBALE I-GUM 14.3
-----------	-----------	--	--------------------	-----------------------------------

HARLO 17
I-GUM 7.3

Use I-GUM DME when on the localizer course.

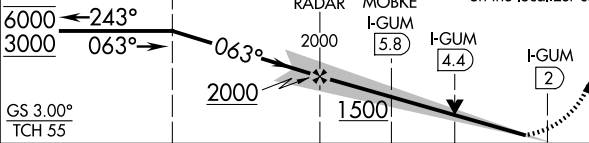

		7 NM	1.6 NM	1.3 NM	2.5 NM	
CATEGORY	A	B	C	D		
S-ILS 6L	590-1½ 334 (300-½)					
S-LOC 6L	1500-¾ 1244 (1200-¾)	1500-1 1244 (1200-1)	1500-3	1244 (1200-3)		
CIRCLING	1500-1¼ 1195 (1200-1¼)	1500-1½ 1195 (1200-1½)	1500-3 1195 (1200-3)	NA		
MOBKE FIX MINIMUMS (DME REQUIRED)						
S-LOC 6L	1100-¾	844 (800-¾)	1100-2	844 (800-2)		
CIRCLING	1100-1 795 (800-1)	1100-1¼ 795 (800-1¼)	1100-2½ 795 (800-2½)	NA		



HIRL all Rwys

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48