

LOC I-JNK 109.1	APP CRS 319°	Rwy Ldg TDZE Apt Elev 6500 937 937
---------------------------	------------------------	--

ILS or LOC RWY 32
DELAWARE COUNTY RGNL (MIE)

ADF or DME required.



When control tower closed, except for operators with approved weather reporting service, use FWA allimeter setting. For inop ALS, increase S-LOC 32 visibility Cats A and B to 1 SM, Cat C to 1½ SM. For inop ALS when using FWA allimeter setting, increase S-ILS 32 visibility all Cats to 1 SM and increase S-LOC 32 Cats C and D to 1½ SM. When local allimeter setting not received, use FWA allimeter setting and increase S-ILS 32 DA to 1258 feet; increase all MDAs 140 feet; increase S-LOC 32 visibility Cats C and D ½ SM and Circling visibility Cats C and D ½ SM. VDP NA when using FWA allimeter setting.

MALSR



MISSED APPROACH: Climb to 1460 then climbing right turn to 2900 direct BALL LOM and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

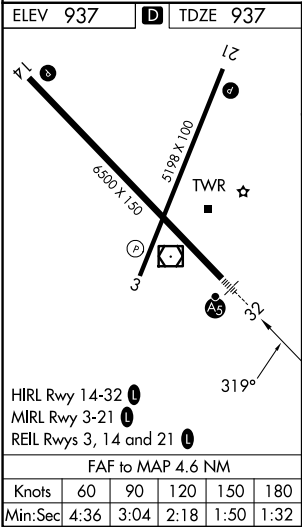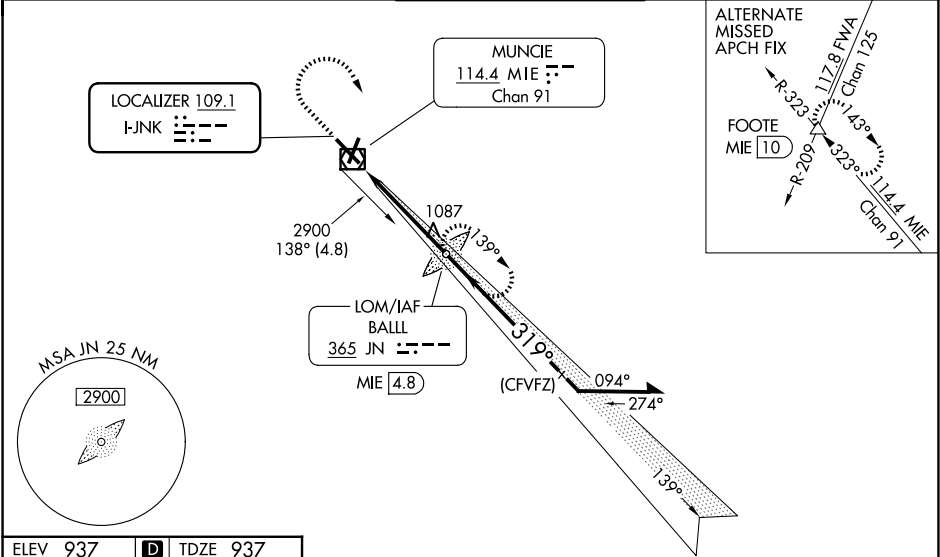

1460	2900	JN	JN LOM BALL MIE 4.8	Remain within 10 NM
1.2	3.4 NM	MIE 1.4	2462	2900
139°	319°	2500	GS 3.00°	TCH 52
CATEGORY	A	B	C	D
S-ILS 32	1137-½	200 (200-½)		
S-LOC 32	1380-½	443 (500-½)	1380-¾	443 (500-¾)
CIRCLING	1460-1	523 (600-1)	1500-1½	1600-2
			563 (600-1½)	663 (700-2)

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026