

VOR/DME GFK 114.3 Chan 90	APP CRS 344°	Rwy Ldg 7351 TDZE 845 Apt Elev 845
---	------------------------	---

VOR RWY 35L
GRAND FORKS INTL (GFK)



When local altimeter setting not received, use Crockston altimeter setting and increase all MDA 80 feet; increase Cat C/D visibility to 1¼ SM and Circling Cat C visibility ¼ SM. Increase ELVAV fix minimums Cat C/D visibility to RVR 4500 and Circling Cat C visibility ¼ SM. For inop ALS, increase S-35L Cat C/D visibility to 1¾ SM. ELVAV fix minimums: For inop ALS, increase S-35L Cat C/D visibility to RVR 5500.

MALSR




MISSED APPROACH: Climb to 1300 then climb to 3600 on GFK R-360 then right turn direct GFK VOR/DME and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	---	---	---------------------------	----------------------------	-------------------------

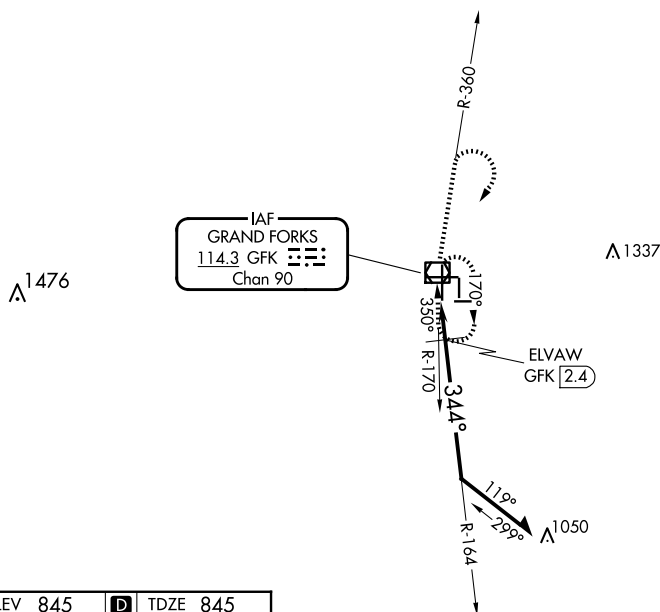

ELEV 845	D	TDZE 845
MIRL Rwy 9L-27R, 9R-27L and 17L-35R L		
HIRL Rwy 17R-35L L		
REIL Rwy 17R, 9L, and 27R L		



The diagram illustrates the geometry for the ELVAW FIX MINIMUMS. It shows a scale from 1300 to 3600, a GFK symbol, and various angles and distances. The diagram includes a scale from 1300 to 3600, a GFK symbol, and various angles (164°, 34°, 3.01°) and distances (1 NM, 1.4 NM).