

WAAS CH 50301 W25A	APP CRS 246°	Rwy Ldg TDZE Apt Elev	5500 515 529
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25

AIKEN RGNL (AIK)

RNP APCH.

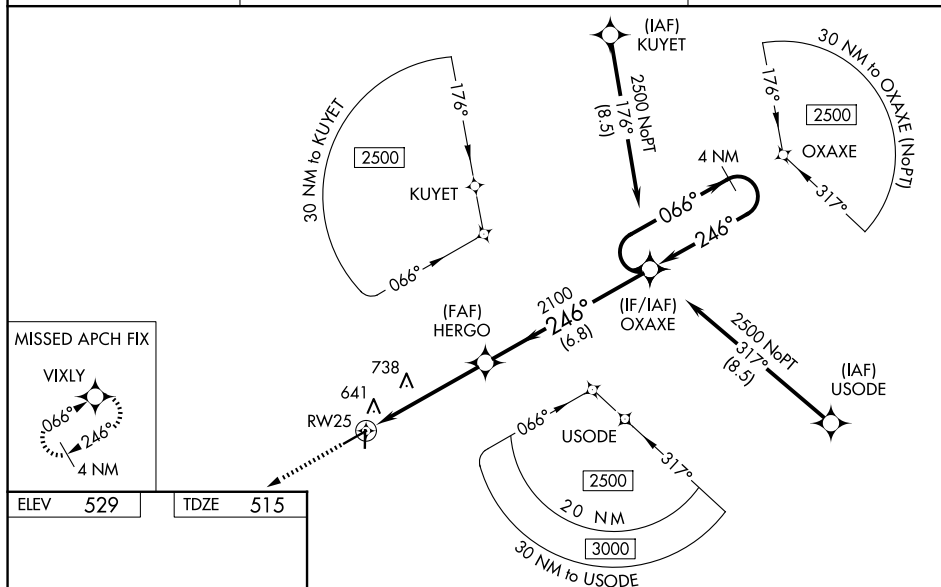
V Baro-VNAV NA when using Augusta Rgnl at Bush Fld altimeter setting.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or
NA above 40°C. VDP NA with Augusta Rgnl at Bush Fld altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase LPV all Cats DA to 869 feet, LNAV/VNAV all Cats DA to 927 feet and all visibilities $\frac{3}{8}$ mile; increase all MDA 120 feet and Cat C/D visibilities $\frac{1}{4}$ mile. For inop ODALS, increase LPV all Cats visibility to $\frac{3}{8}$ mile, LNAV/VNAV all Cats to 1 $\frac{1}{2}$ mile and LNAV Cat C/D to $\frac{1}{4}$ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase LPV all Cats visibility to $\frac{1}{4}$ mile, LNAV/VNAV all Cats to $\frac{1}{2}$ mile and LNAV Cat D to $\frac{1}{8}$ mile.

ODALS



MISSED APPROACH:
Climb to 3000 direct
VIXLY and hold.


AWOS-3PT
118.025

AUGUSTA APP CON★
119.15 284.625UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX



ELEV 5

 TDZE | 51.5 |

REIL Rwy 25

MIRI Rwy 7-25 

3000	VIXLY
	

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 27).

4 NM
Holding Pattern

* LNAV only.

1.0 nm

HERGO

0500

GP 3.00°
TCH 45

CATEGORY		A	B	C	D
LPV	DA	765-¾ 250 (300-¾)			
LNAV/ VNAV	DA	823-1 308 (300-1)			
LNAV	MDA	940-¾ 425 (500-¾)		940-1⅞ 425 (500-1⅞)	

RNAV (GPS) RWY 25