

WAAS CH 50223 W23A	APP CRS 235°	Rwy Idg 5004 TDZE 921 Apt Elev 921
--	------------------------	---

RNAV (GPS) RWY 23

TAYLOR COUNTY (AAS)


▼

NA

Baro-VNAV NA when using Somerset altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Somerset altimeter setting: increase all DA 89 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats visibility ⅓ mile, increase LNAV Cats C and D visibility ¼ mile, and increase Circling Cats C visibility ¼ mile and Cat D visibility ½ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct KANOA and hold.

AWOS-3 121.125	INDIANAPOLIS CENTER 124.625 353.65	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

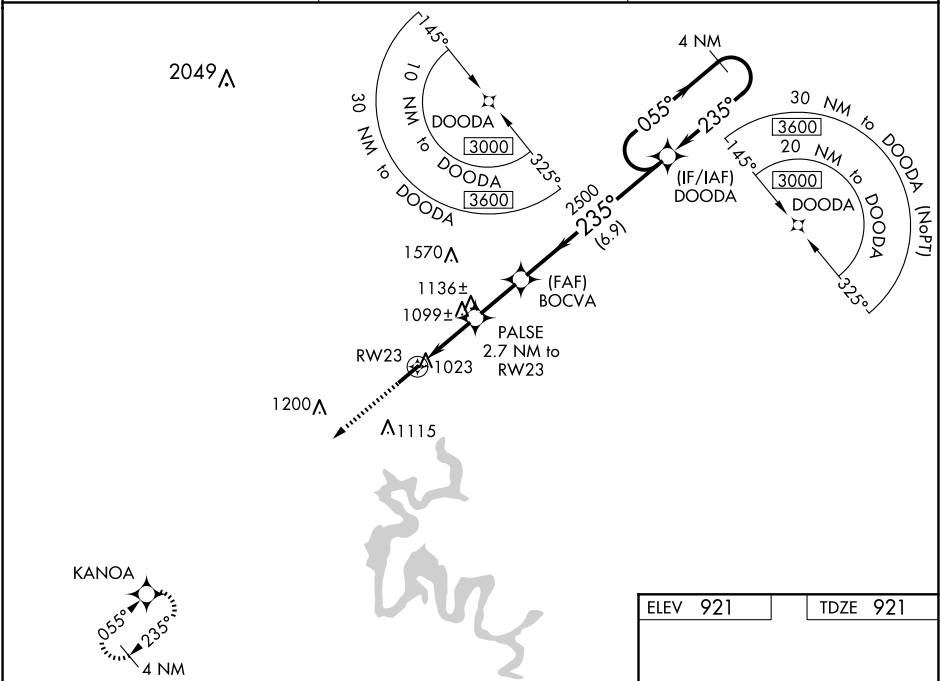

3000	KANOA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 40).			4 NM
			DOODA	Holding Pattern	
*LNAV only.		PALSE 2.7 NM to RW23	BOCVA 2500	055° → ← 235°	3000
		*1820	2500	GP 3.00° TCH 48	
2.7 NM		2.1 NM	6.9 NM		
CATEGORY	A	B	C	D	
LPV DA	1177-¾		256 (300-¾)		
LNAV/ VNAV DA	1366-1½		445 (500-1½)		
LNAV MDA	1360-1	439 (500-1)	1360-1¼	439 (500-1¼)	
 CIRCLING	1380-1 459 (500-1)	1400-1 479 (500-1)	1480-1½ 559 (600-1½)	1660-2¼ 739 (800-2¼)	

