

WAAS CH 77900 W13A	APP CRS 130°	Rwy Ldg TDZE 1301 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 13



MITCHELL MUNI (MHE)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using HON altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HON altimeter setting and increase LPV DA to 1664 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 1776 feet and all visibilities $\frac{1}{4}$ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

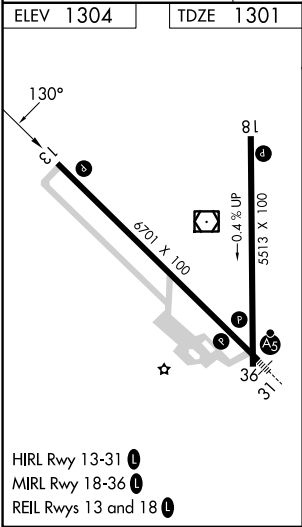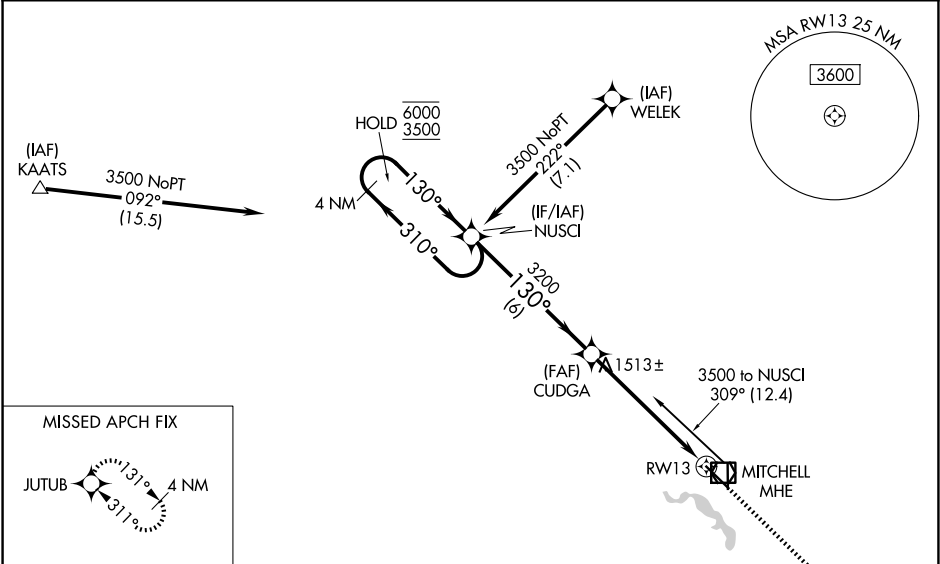

4 NM Holding Pattern		NUSCI		CUDGA		3200 ↑		JUTUB ✦	
6000 ← 310°		130° →		130°		1.4 NM to RW13		RW13	
3500				3200					
GP 3.00°									
TCH 46		6 NM		4.4 NM		1.4 NM			
CATEGORY	A	B	C	D					
LPV DA	1575-1 274 (300-1)								
LNAV/ VNAV DA	1687-1¼ 386 (400-1¼)								
LNAV MDA	1780-1 479 (500-1)			1780-1⅝ 479 (500-1⅝)					
CIRCLING	1780-1¼ 476 (500-1¼)			1820-1½ 516 (600-1½)			1880-2 576 (600-2)		

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026