

WAAS CH 72717 W01A	APP CRS 014°	Rwy Ldg 5701 TDZE 956 Apt Elev 956
--	------------------------	---

RNAV (GPS) RWY 1
AMES MUNI (AMW)

RNP APCH.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). For inop MALS, increase LNAV Cats A, B visibility to 1 mile.

MALSR



MISSED APPROACH: Climb to 3000
direct FULLE and hold.

ASOS 132.025	DES MOINES APP CON 123.9 307.15	CLNC DEL 126.0	UNICOM 122.7 (CTAF) 0
------------------------	---	--------------------------	---------------------------------

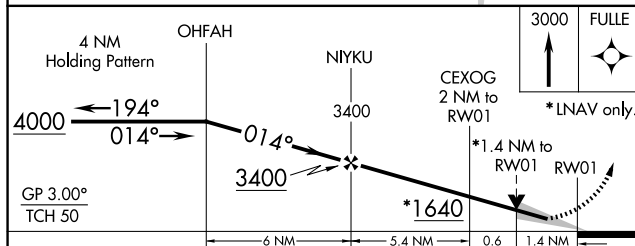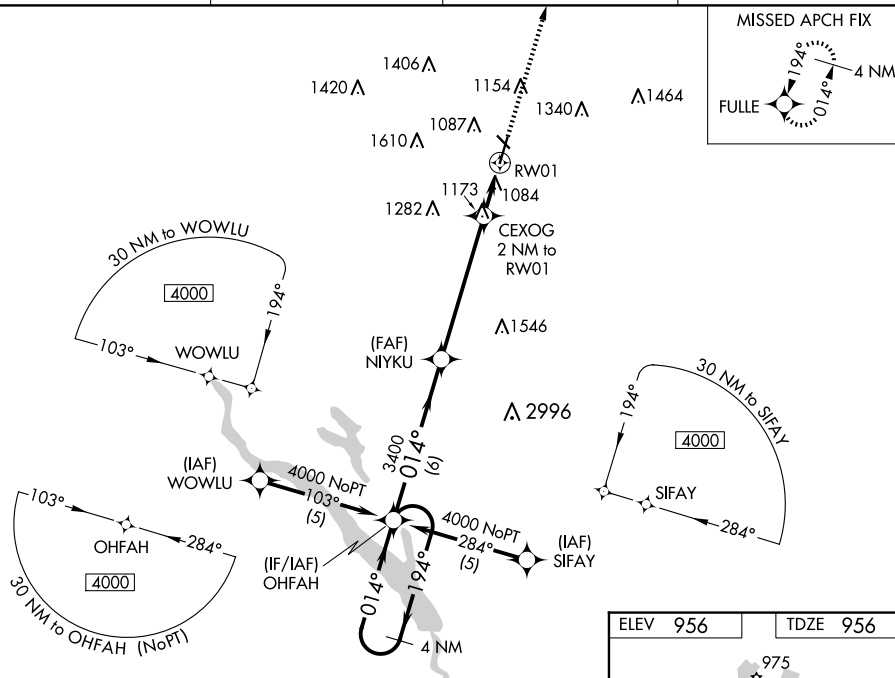

CATEGORY		A	B	C	D
LPV	DA	1261 ^{-3/4} 305 (400 ^{-3/4})			NA
LNAV/ VNAV	DA	1364-1 408 (500-1)			NA
LNAV	MDA	1440 ^{-3/4} 484 (500 ^{-3/4})			NA
CIRCLING		1440-1 484 (500-1)	1460-1 504 (600-1)	1640-2 684 (700-2)	NA

