

LOC/DME I-CRQ 108.7 Chan 24	APP CRS 245°	Rwy Ldg TDZE Apt Elev 4897 326 331	ILS or LOC RWY 24 MC CLELLAN-PALOMAR (CRQ)
---	------------------------	--	---

▼


▲

Inop table does not apply to S-ILS Rwy 24.
Autopilot coupled approach NA below 960. DME required.
Rwy 24 helicopter visibility reduction below RVR 4000 NA. For inop ALS,
increase S-LOC 24 Cat A/B visibility to RVR 5500 and Cat C visibility to 1 1/2 SM.

MALSR

MISSED APPROACH: Climb
to 3000 on heading 245°
and on OCN VORTAC R-145
to OCN VORTAC and hold.

ATIS 120.15	SOCAL APP CON 127.3 323.0	PALOMAR TOWER★ 118.6 (CTAF) 0 276.4	GND CON 121.8
-----------------------	-------------------------------------	---	-------------------------

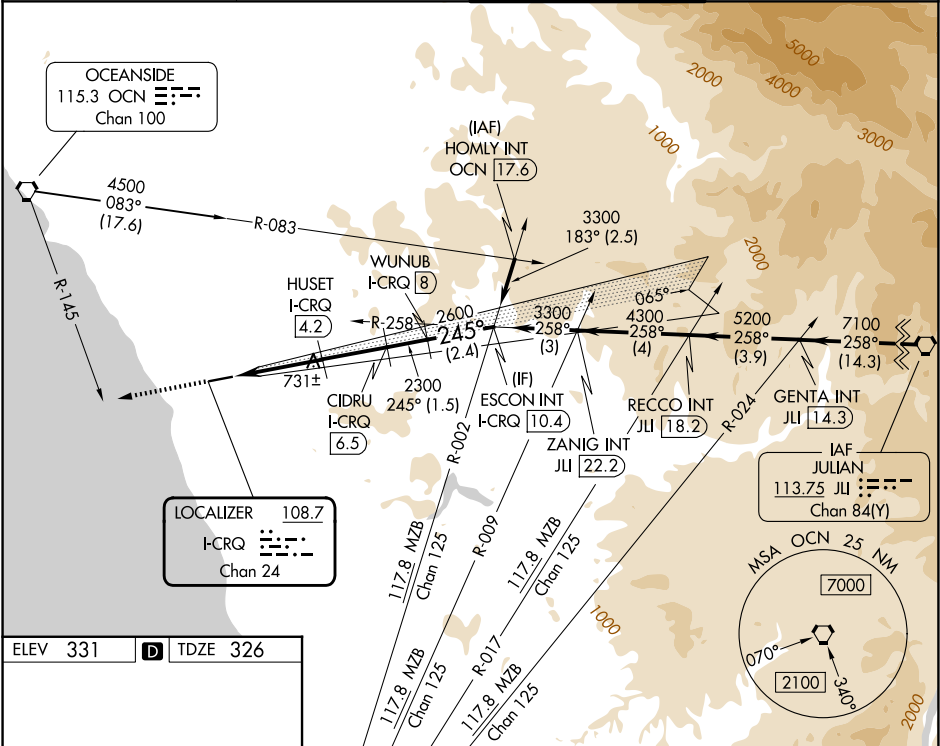

ELEV 331

D

TDZE 326

	3000	OCN R-145	OCN	CIDRU I-CRQ [6.5]	WUNUB I-CRQ [8]	ESCON INT I-CRQ [10.4]
	hdg 245°			HUSET I-CRQ [4.2]		
	*LOC only	*I-CRQ [2.7]				
	I-CRQ [0.9]					
	1.8 NM	1.5 NM	2.4 NM	1.5 NM	2.4 NM	
CATEGORY	A	B	C	D		
S-ILS 24	527/40	201 (200-3/4)	576/40 250 (300-3/4)	NA		
S-LOC 24	1000/40	674 (700-3/4)	1000-1 1/2 674 (700-1 1/2)	NA		
CIRCLING	1000-1 669 (700-1)	1020-1 689 (700-1)	1260-2 3/4 929 (1000-2 3/4)	NA		

HIRL Rwy 6-24

MC CLELLAN-PALOMAR (CRQ)

ILS or LOC RWY 24