

LOC I-FZU 111.1	APP CRS 259°	Rwy Ldg TDZE 7005 462 Apt Elev 463
---------------------------	------------------------	--


ILS or LOC RWY 26L
SPIRIT OF ST LOUIS (SUS)

⚠ When local alimeter setting not received, use St Louis Lambert Intl alimeter setting:
⚠ increase S-ILS 26L DA to 705 feet; increase all MDAs 60 feet and S-LOC 26L visibility Cat C and D ½ SM and Circling visibility C ¼ SM. For inop ALS, increase S-LOC 26L Cats C and D visibility to 1½ SM. For inop ALS when using St Louis Lambert Intl alimeter setting, increase S-LOC 26L Cats C and D visibility to 2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).

MALSR

⚠ MISSED APPROACH: Climb to 2400 then right turn direct FTZ VORTAC and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER* 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95
----------------------	---	---	-------------------------	--------------------------	---	-------------------------

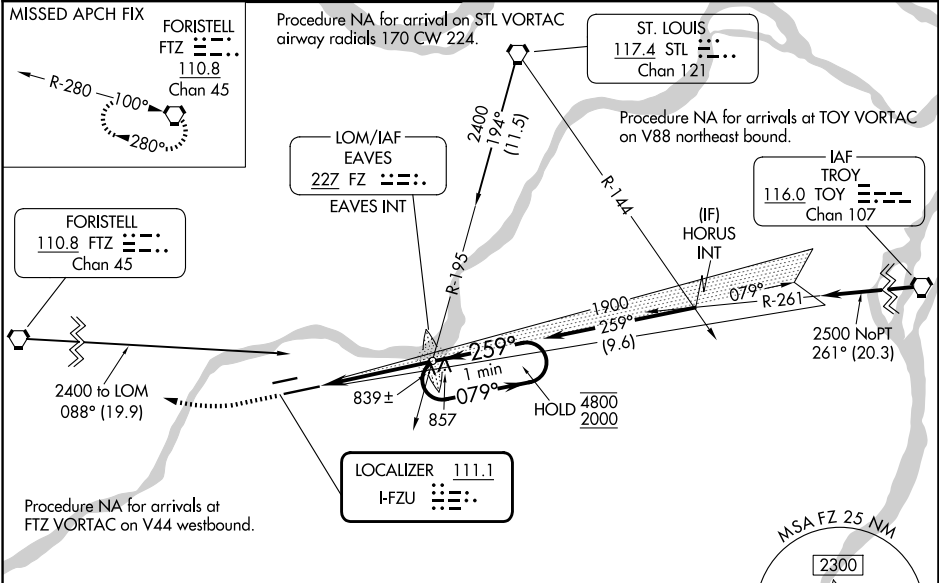

ELEV 463	D	TDZE 462
-----------------	----------	-----------------

HIRL Rwy 8R-26L **⚠**
MIRL Rwy 8L-26R **⚠**

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

2400

FTZ

FZ LOM EAVES INT

1871

079° 4800

259° 2000

1900

4.2 NM

GS 3.00°
TCH 55

CATEGORY	A	B	C	D
S-ILS 26L *	662/24 200 (200-½)			
S-LOC 26L	1140/24	678 (700-½)	1140-1½	678 (700-1½)
CIRCLING	1140-1	677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026