



WAAS CH 86627 W30A	APP CRS 302°	Rwy Idg 5500 TDZE 1145 Apt Elev 1145
--	------------------------	---

RNAV (GPS) RWY 30

OWATONNA DEGNER RGNL (OWA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME/RNP-0.3 NA. When local altimeter setting not received, use Fairbault altimeter setting and increase all DA 41 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cats C/D visibility to 1 mile, Cat C Circling visibility to 1¾ mile and Cat D visibility to 2½ mile. VDP and Baro-VNAV NA when using Fairbault altimeter setting. For inop MALS R increase LNAV/VNAV all Cats visibility to 1½ miles. For inop MALS R, when using Fairbault altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 1¾ mile.	MALS R 	MISSED APPROACH: Climb to 2800 direct NOVS and hold.
--	--	--

AWOS-3 128,325	ROCHESTER APP CON ★ 119.8 251,125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

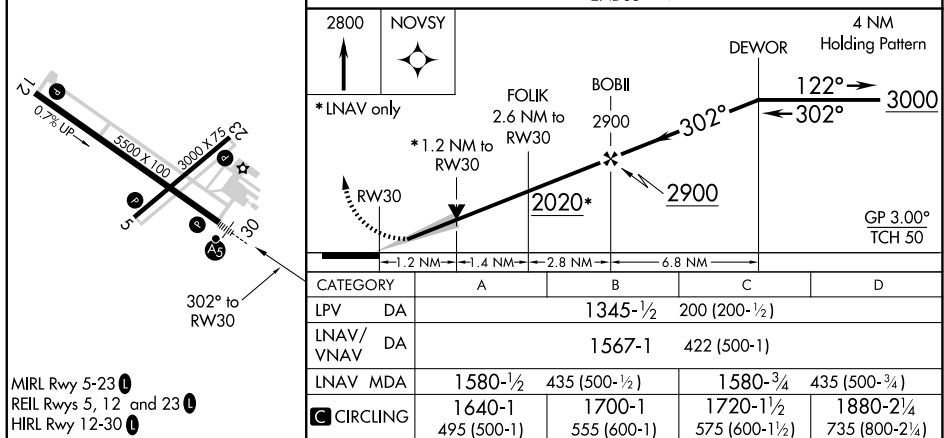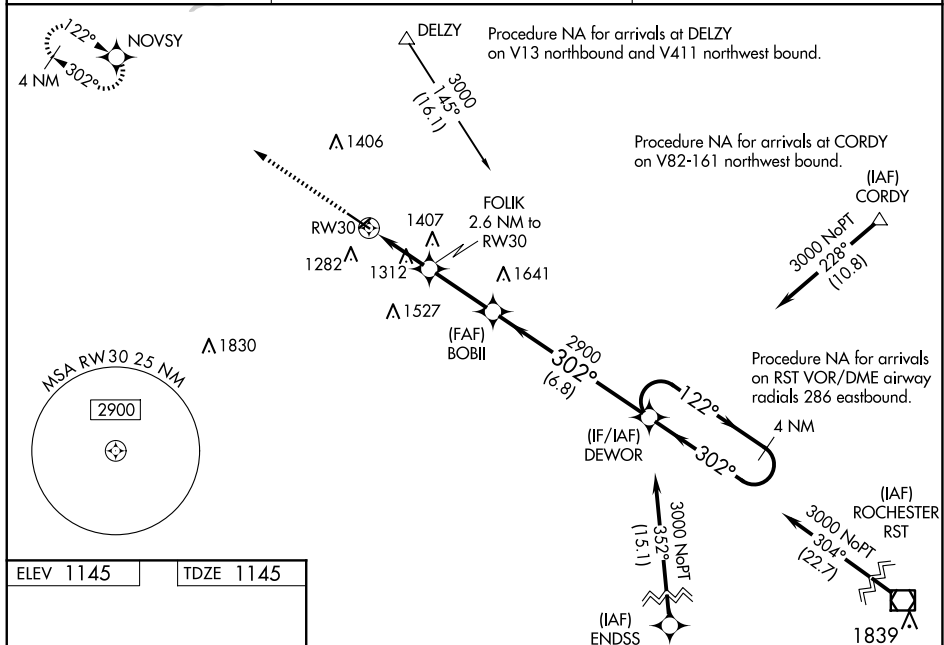

OWATONNA, MINNESOTA

Amdt 1 10DEC15

OWATONNA DEGNER RGNL (OWA)

RNAV (GPS) RWY 30

44°07'N-93°16'W

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026