

WAAS
CH **61214**
W11A

APP CRS
110°

Rwy Idg
TDZE
Apt Elev
5101
1730
1730

RNAV (GPS) RWY 11

SCHUYLKILL COUNTY/JOE ZERBEY (Z·ER)


RNP APCH.

NA

Circling NA to Rws 4 and 22. Baro-VNAV NA when using Selinsgrove altimeter setting. For uncompensated Baro-VNAV Systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Selinsgrove altimeter setting and increase LPV DA to 2191 feet, LNAV/VNAV DA to 2281 feet and all MDAs 280 feet. Increase LPV all Cats visibility ⅔ SM, LNAV/VNAV all Cats visibility ¾ SM, LNAV Cats C/D visibility ⅔ SM and Circling Cats C/D visibility ¾ SM. VDP NA when using Selinsgrove altimeter setting.

MISSED APPROACH:
Climb to 4000 direct
ETSIW and hold.

AWOS-3 127.575	HARRISBURG APP CON 118.25 269.45	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

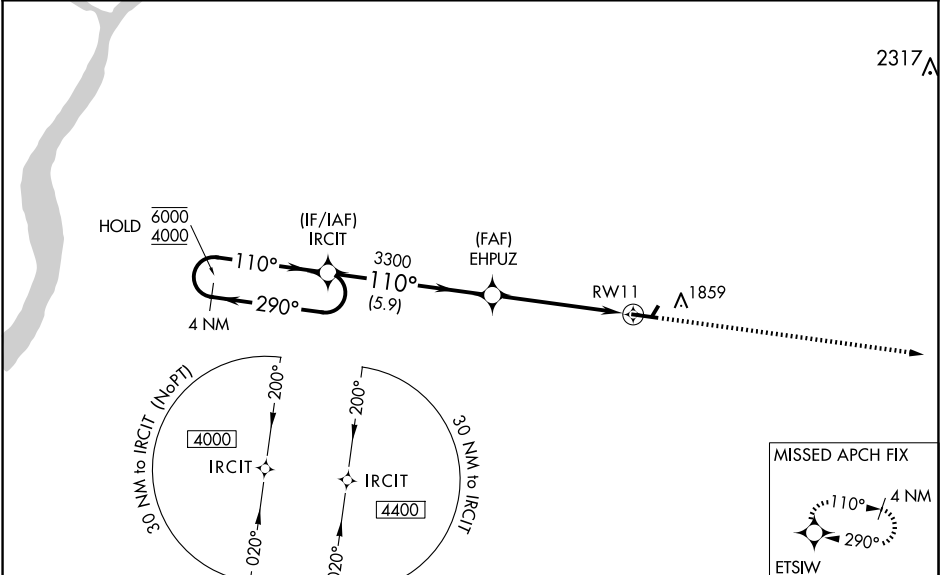

ELEV 1730

TDZE 1730

4 NM Holding Pattern

IRCIT

EHPUZ

RW11

GP 3.00° TCH 42

6000 4000

290° 110°

3400

5.9 NM 3.7 NM 1.4 NM

4000

ETSIW

*1.4 NM to RW11

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1930-¾ 200 (200-¾)			
LNAV/ DA VNAV	2020-⅞ 290 (300-⅞)			
LNAV MDA	2200-1 470 (500-1)		2200-1⅓ 470 (500-1⅓)	
CIRCLING	2200-1 470 (500-1)		2220-1½ 490 (500-1½) 2280-2 550 (600-2)	

REIL Rws 11 and 29 0

MIRL Rwy 11-29 0

110°

5101 X 75

0.5% UP

29