
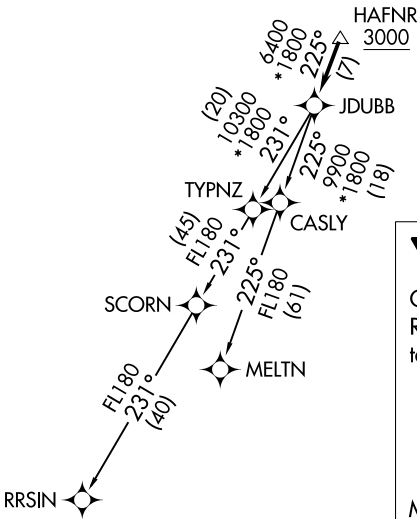


ATIS  
128.175  
CLNC DEL  
351.8  
GND CON  
121.9 351.8  
DAVISON TOWER ★  
124.275 (CTAF) 229.4  
POTOMAC DEP CON  
118.95 257.2

TOP ALTITUDE:  
3000

TAKEOFF MINIMUMS:

Rwy 14: Standard.  
Rwy 32: 400-2 or standard with minimum  
climb of 300' per NM to 500.



NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: Turbo-jets only.

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect  
RADAR vectors to HAFNR, then on track 225°  
to JDUBB, thence....

....on assigned transition, maintain 3000,  
expect clearance to filed altitude within  
ten (10) minutes after departure.

MELTN TRANSITION (JDUBB4.MELTN)  
RRSIN TRANSITION (JDUBB4.RRSIN)

NOTE: Chart not to scale.