WAAS CH 56627 W19A	APP CRS 187°	Rwy ldg 6502 TDZE 130 Apt Elev 130

RNAV (GPS) RWY 19
HARRELL FLD (CDH)

RNP APCH-GPS.

Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using El Dorado altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use El Dorado altimeter setting and LPV DA to 517 feet, LNAV/VNAV DA to 503 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ SM, and LNAV Cats C and D, and Circling Cat D ¼ SM.

MISSED APPROACH: Climb to 2700 direct URAME and hold.

AWOS-3	FORT WORTH CENTER	UNICOM
125.2	128.2 269.1	122.7 (CTAF) L

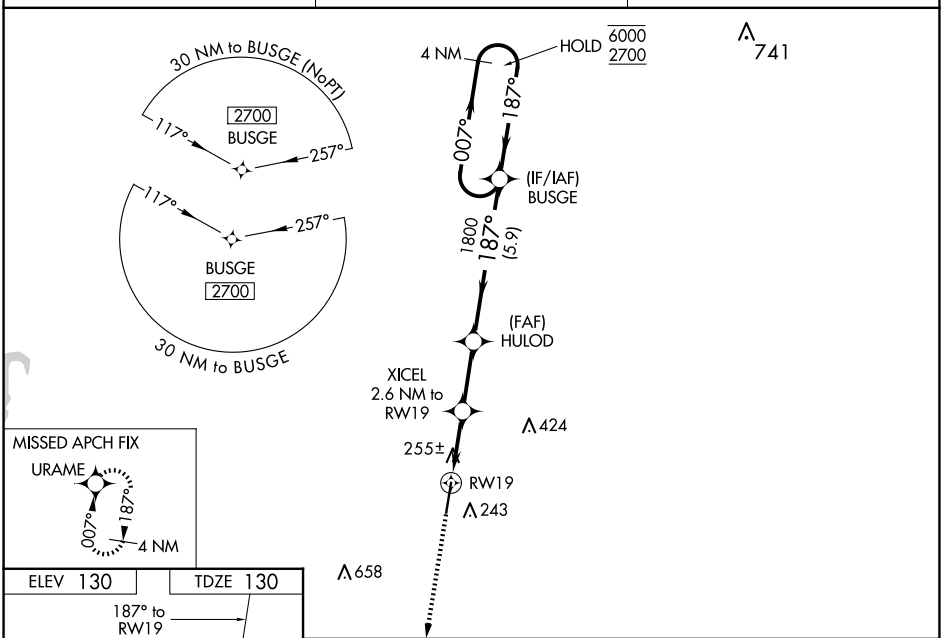

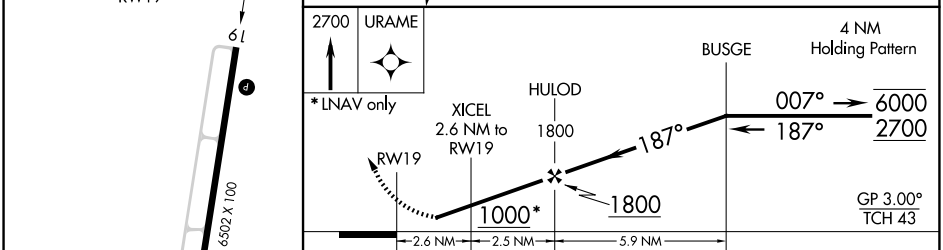

CATEGORY	A	B	C	D
LPV DA	440-1 310 (400-1)			
LNAV/VNAV DA	426-1 296 (300-1)			
LNAV MDA	520-1 390 (400-1)		520-1⅛ 390 (400-1⅛)	
CIRCLING	560-1 430 (500-1)	580-1 450 (500-1)	580-1½ 450 (500-1½)	960-2¾ 830 (900-2¾)

REIL Rwys 1 and 19 L
MIRL Rwy 1-19 L

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026