


LOC/DME	I-OTI	APP CRS	Rwy Ldg
108.5		219°	2999
Chan 22			TDZE 172
			Apt Elev 172

LOC RWY 22

NEWPORT STATE (UUU)

NA When local altimeter setting not received, use Providence altimeter setting and increase all MDA 60 feet. Straight-in Rwy 22 NA at night, Circling Rwy 4, 22, 34 NA at night.	MISSED APPROACH: Climbing left turn to 2100 via PVD VOR/DME R-165 to NICOD INT/21.5 DME and hold.
--	---

ASOS 132.075	PROVIDENCE APP CON* 128.7 269.525	CLNC DEL 127.25	UNICOM 123.05 (CTAF) 0
-----------------	--------------------------------------	--------------------	---------------------------

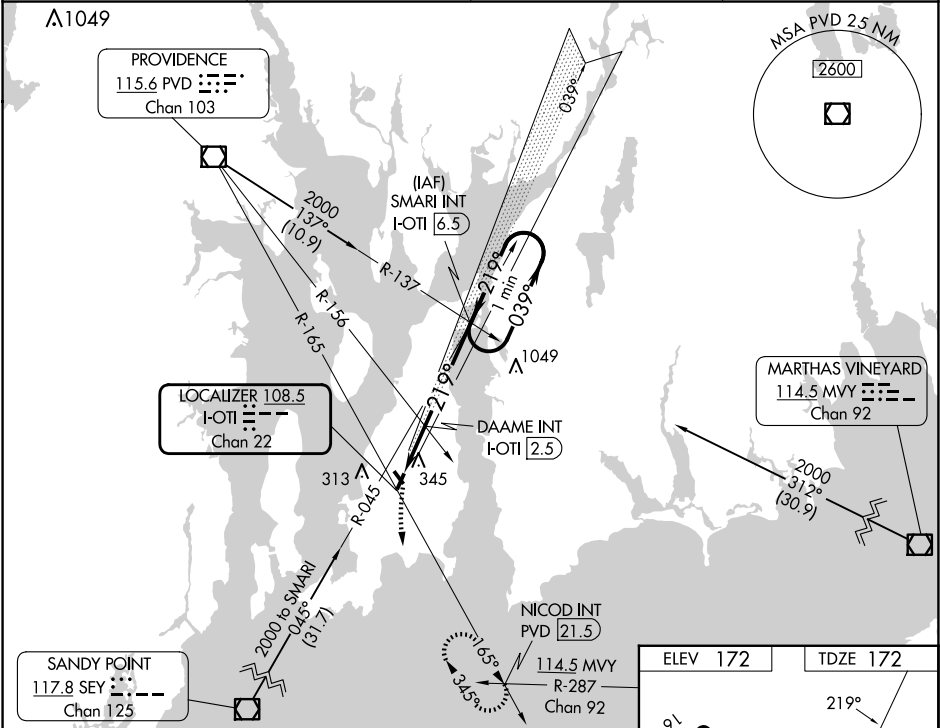

2100 PVD R-165		NICOD INT	DAAME INT I-OTI 2.5	SMARI INT I-OTI 6.5	One Minute Holding Pattern
720*		219°	1800	039°	2000
1.9 NM		4 NM		*780 when using Providence altimeter setting.	
CATEGORY	A	B	C	D	
S-22	720-1	548 (600-1)	720-1 ⁵ / ₈ 548 (600-1 ⁵ / ₈)	NA	
CIRCLING	760-1	588 (600-1)	780-1 ³ / ₄ 608 (700-1 ³ / ₄)	NA	
DAAME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-22	640-1	468 (500-1)	640-1 ¹ / ₄ 468 (500-1 ¹ / ₄)	NA	
CIRCLING	760-1	588 (600-1)	780-1 ³ / ₄ 608 (700-1 ³ / ₄)	NA	

