


WAAS CH 48835 W31A	APP CRS 306°	Rwy Ldg TDZE Apt Elev	6143 4940 4970
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31
JOHNSON COUNTY (BYG)

⚠ When Rwy 13 VGSi inop, Circling Rwy 13 NA at night. Baro-VNAV and VDP NA when using Sheridan altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (120°F). Circling NA southwest of Rwy 13-31. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Sheridan altimeter setting and increase all DA/MDA 200 feet; increase all LPV, LNAV/VNAV, and all LNAV and Circling Cat C/D visibilities ¾ mile.

MISSED APPROACH: Climb to 6000, then climbing right turn to 7000 direct ONECI and hold.

ASOS 135.425	SALT LAKE CENTER 127.75 351.9	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

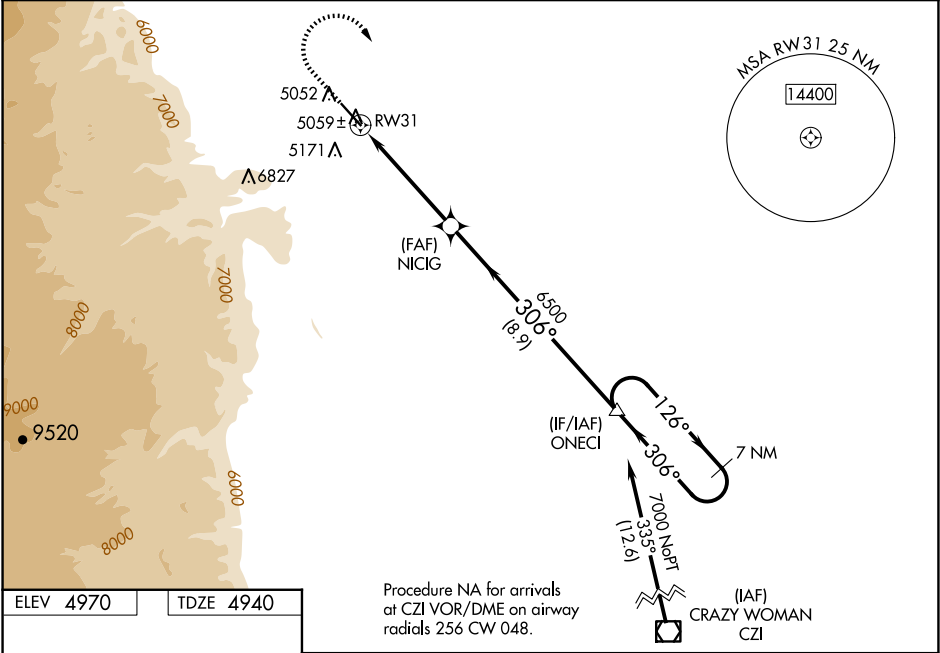

ELEV 4970	TDZE 4940	Procedure NA for arrivals at CZI VOR/DME on airway radials 256 CW 048.			
		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).			
		* LNAV only			
		* 1.1 NM to RW31			
		1.1 NM 3.7 NM 8.9 NM			
		7 NM Holding Pattern			
		GP 3.00° TCH 51			
		CATEGORY A B C D			
		LPV DA 5190-¾ 250 (300-¾)			
		LNAV/VNAV DA 5275-1⅞ 335 (400-1⅞)			
		LNAV MDA 5320-1 380 (400-1)		5320-1⅞ 380 (400-1⅞)	
		CIRCLING 5440-1 470 (500-1)		5460-1½ 490 (500-1½)	
				5600-2 630 (700-2)	