

WAAS CH 56513 W04A	APP CRS 042°	Rwy Ldg 7099 TDZE 158 Apt Elev 158
--	------------------------	---

RNAV (GPS) RWY 4

ROCKY MOUNT/WILSON RGNL (RWI)

RNP APCH - GPS.


V Baro-VNAV and VDP NA when using GWW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use GWW altimeter setting and increase LPV DA to 467 feet; increase LNAV/VNAV DA to 601 feet and all visibilities ¼ SM, increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibilities ¼ SM. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM. For inop ALS when using GWW altimeter setting, increase LPV all Cats visibility to ¾ SM.

MALSR




MISSED APPROACH:
Climb to 2500 direct
FENIM and hold.

ASOS 118.875	WASHINGTON CENTER 123.85 279.65	UNICOM 123.05 (CTAF) 0
------------------------	---	----------------------------------

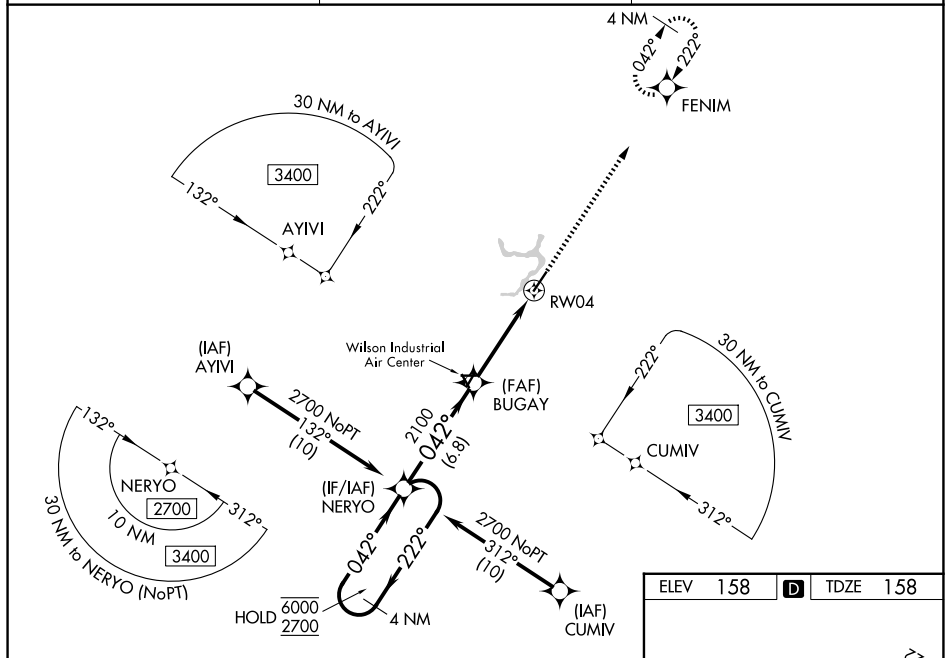

ELEV	158	D	TDZE	158
------	-----	----------	------	-----

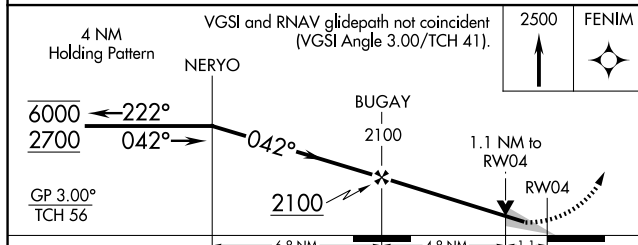

CATEGORY		A		B		C		D	
LPV	DA			408- ¹ / ₂		250 (300- ¹ / ₂)			
INAV/ VNAV	DA			542- ⁵ / ₈		384 (400- ⁵ / ₈)			
INAV	MDA	560- ¹ / ₂		402 (500- ¹ / ₂)		560- ³ / ₄		402 (500- ³ / ₄)	
CIRCLING		600-1		620-1		720-1 ¹ / ₂		740-2	
		442 (500-1)		462 (500-1)		562 (600-1 ¹ / ₂)		582 (600-2)	

