

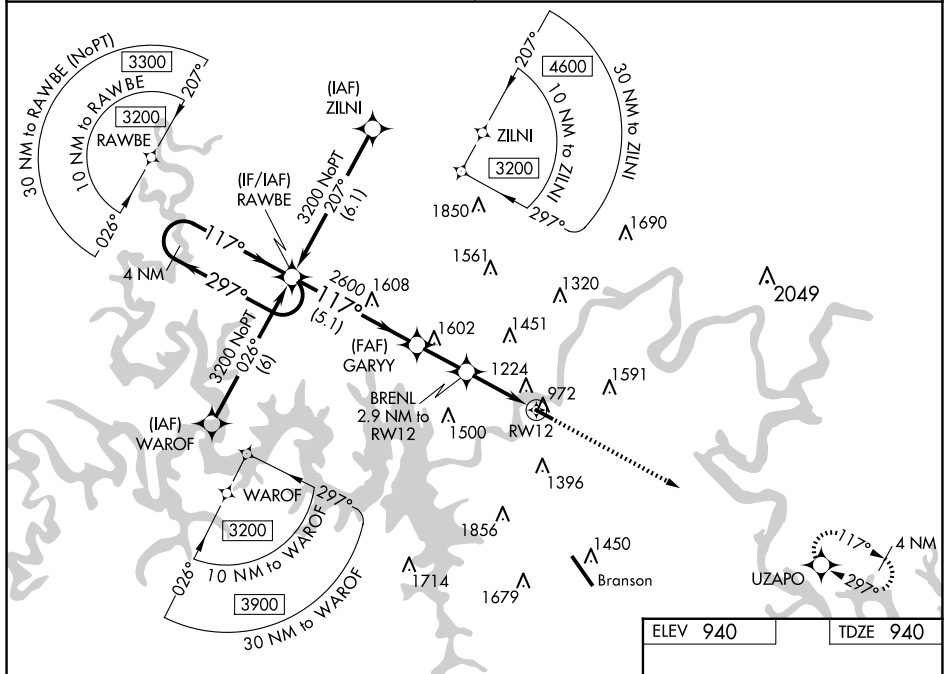
WAAS CH 78220 W12A	APP CRS 117°	Rwy Idg 3449 TDZE 940 Apt Elev 940
--	------------------------	---

RNAV (GPS) RWY 12
M GRAHAM CLARK DOWNTOWN (PLK)

T Baro-VNAV NA when using Branson altimeter setting. For uncompensated Baro-VNAV systems, **A** **NA** LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Branson altimeter setting. Obtain local altimeter setting on CTAf; when not received, use Branson altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility 1/4 mile.

MISSED APPROACH:
Climb to 3200 direct
UZAPO and hold.

SPRINGFIELD APP CON
126.35

UNICOM
122.7 (CTAF) **L**

4 NM Holding Pattern RAWBE

*LNAV only

3200

297°

117°

3200

117°

2600

GARYY

BRENL

2.9 NM to RW12

*1.7 NM to RW12

2600

*1920

1700

RW12

5.1 NM

2 NM

1.2 NM

1.7 NM

GP 3.10° TCH 40

UZAPO

CATEGORY	A	B	C	D
LPV DA	1140-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	1416-1 5/8	476 (500-1 5/8)		NA
LNAV MDA	1540-1	600 (600-1)		NA
CIRCLING	1560-1	620 (700-1)		NA

NC-3, 25 DEC 2025 to 22 JAN 2026