

LOC I-BPM 111.9	APP CRS 133°	Rwy Ldg TDZE Apt Elev	7000 1031 1031
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
ST CLOUD RGNL (STC)


DME required.

⚠ For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to 7/8 SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D 1/4 SM, and Circling visibility Cats C and D 1/4 SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1 3/4 SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

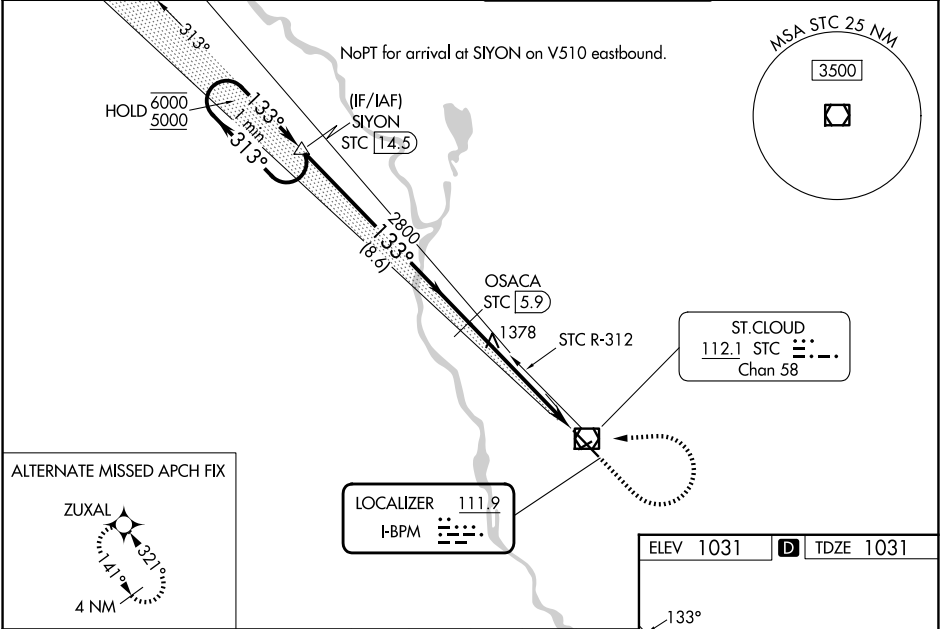

One Minute Holding Pattern 6000 ← 313° 5000 → 133° GS 3.00° TCH 49		SIYON STC 14.5	2500 5000 OSACA STC 5.9	STC STC R-312 STC 2.3	SIYON △
		8.6 NM	3.7 NM	1.8 NM	
CATEGORY	A	B	C	D	
S-ILS 13	1231-1/2 200 (200-1/2)				
S-LOC 13	1640-1/2 609 (700-1/2)		1640-1 3/8 609 (700-1 3/8)		
CIRCLING	1640-1 609 (700-1)		1640-1 3/4 609 (700-1 3/4)		1860-2 3/4 829 (900-2 3/4)

