

LOC I-STD <u>111.9</u>	APP CRS 313°	Rwy Ldg TDZE Apt Elev	7000 1020 1031
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 31
ST CLOUD RGNL (STC)

DME required.


NA When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1296 feet, increase all MDAs 80 feet and S-LOC 31 visibility. Cats C and D $\frac{1}{4}$ SM, and Circling visibility Cats C and D $\frac{1}{4}$ SM. For inop ALS when using Little Falls altimeter setting, increase S-ILS-31 visibility to $\frac{1}{2}$ SM and S-LOC-31 Cats C and D visibility to 1 $\frac{1}{2}$ SM. VDP NA when using Little Falls altimeter setting. DME from STC VOR/DME. DME use requires simultaneous reception of I-STC and STC DME.

MALS R




MISSED APPROACH: Climb to 2800 then climbing left turn to 3500 direct STC VOR/DME and on STC VOR/DME R-134 to SANLY/STC VOR/DME 14.1 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235,775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
-----------------------------------	--	--	-------------------------------------

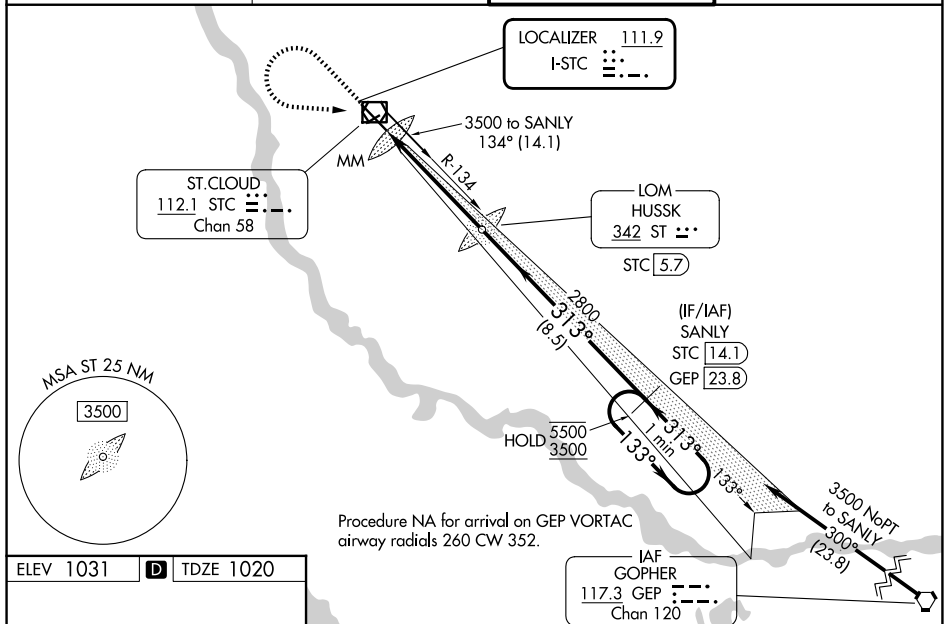

ELEV 1031	D	TDZE 1020
-----------	----------	-----------

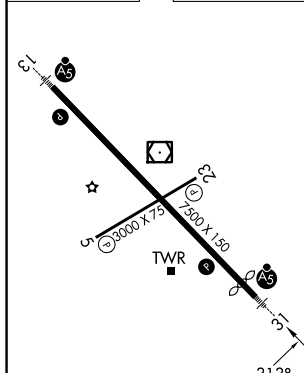

MIRL Rwy 5-23 L					
HIRL Rwy 13-31 L					
FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

2800 ↑	3500 ↖	STC R-134	SANLY STC 14.1	SANLY STC 14.1 One Minute Holding Pattern 133° → 5500 ← 313° 3500 GS 3.00° TCH 51	
ST LOM HUSSK STC 5.7 2671 313° 2800		STC 1.9 MM 0.5 0.7 3.8 NM 8.5 NM			
CATEGORY	A	B	C	D	
S-ILS 31	1220-1/2 200 (200-1/2)				
S-LOC 31	1460-1/2 440 (500-1/2)		1460-3/4 440 (500-3/4)		
CIRCLING	1500-1 469 (500-1)		1620-1 589 (600-1 1/2)		1860-2 3/4 829 (900-2 3/4)