



|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>90418</b><br><b>W17A</b> | APP CRS<br><b>165°</b> | Rwy Ldg<br>TDZE <b>246</b><br>Apt Elev <b>246</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 17

BARNWELL RGNL (BNL)

|                                                                                                                                                                                    |       |                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------------------------------------|
| RNP APCH.                                                                                                                                                                          | ODALS | MISSED APPROACH: Climb to 2100 direct CULPA and hold. |
| Circling Rwy 5, 23 NA at night. Inop table does not apply to LPV, LNAV/VNAV all Cats, and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. |       |                                                       |

|                            |                                             |                       |                                        |
|----------------------------|---------------------------------------------|-----------------------|----------------------------------------|
| AWOS-3PT<br><b>119.775</b> | JACKSONVILLE CENTER<br><b>132.925 363.2</b> | GCO<br><b>121.725</b> | UNICOM<br><b>122.8</b> (CTAF) <b>1</b> |
|----------------------------|---------------------------------------------|-----------------------|----------------------------------------|

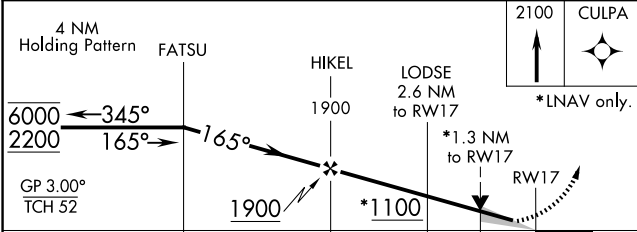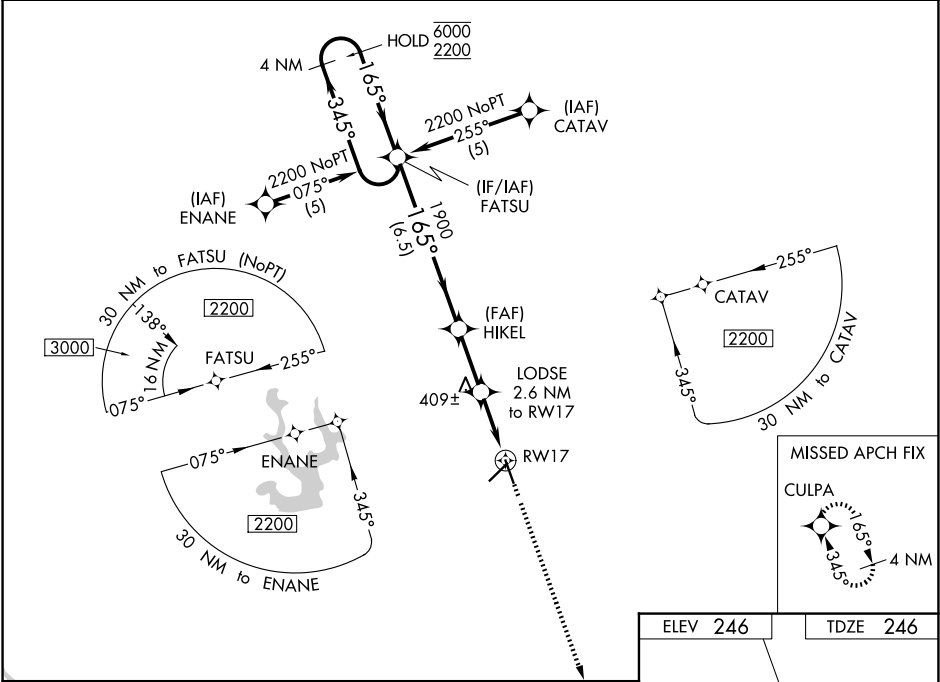

| CATEGORY     | A       | B             | C                            | D                            |
|--------------|---------|---------------|------------------------------|------------------------------|
| LPV DA       |         | 496-3/4       | 250 (300-3/4)                |                              |
| LNAV/VNAV DA |         | 604-1 1/4     | 358 (400-1 1/4)              |                              |
| LNAV MDA     | 700-3/4 | 454 (500-3/4) | 700-1 1/4<br>454 (500-1 1/4) | 700-1 1/2<br>454 (500-1 1/2) |
| CIRCLING     | 700-1   | 454 (500-1)   | 900-1 1/4<br>654 (700-1 1/4) | 900-2<br>654 (700-2)         |

