

APP CRS
345°

Rwy Ldg
TDZE
246

Apt Elev
246

RNAV (GPS) RWY 35

BARNWELL RGNL (BNL)

RNP APCH - GPS.


▼

▲ NA

VDP NA when using AGS altimeter setting. When local altimeter setting not received, use AGS altimeter setting and increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. Circling Rwy 5, 23 NA at night.

MISSED APPROACH: Climb to 2200 direct FATSU and hold.

AWOS-3PT 119.775	JACKSONVILLE CENTER 132.925 363.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	---	-----------------------	---------------------------------

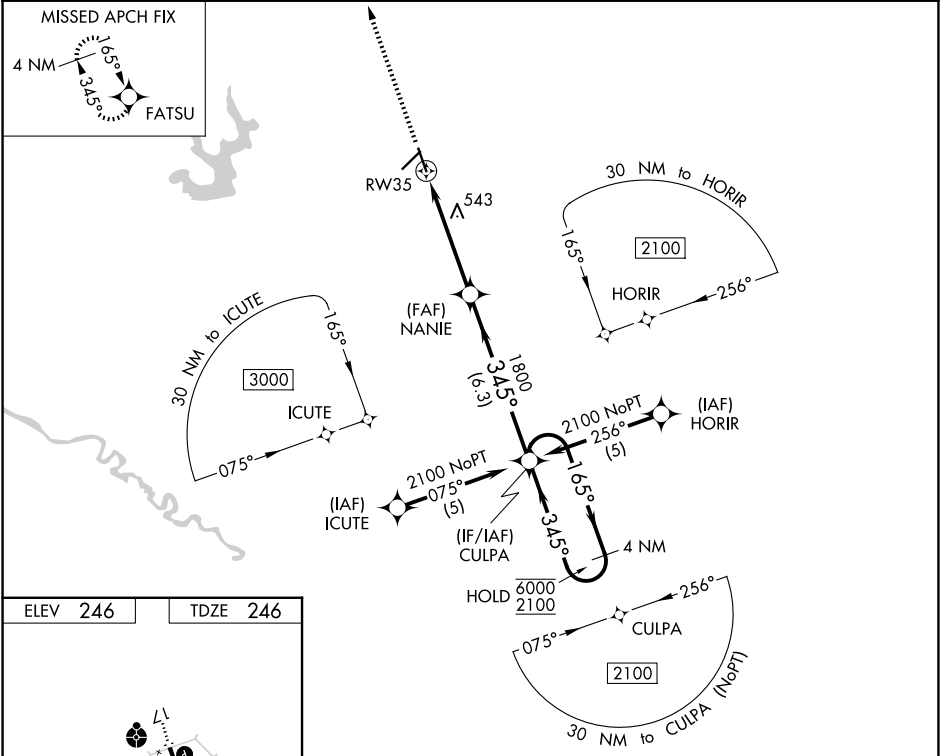

ELEV 246

TDZE 246

MIRL Rwy 17-35 0

2200

FATSU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).

NANIE

1.8 NM to RW35

3.04° TCH 42

1.8

2.9 NM

6.3 NM

CULPA

4 NM Holding Pattern

165°

345°

6000

2100

CATEGORY	A	B	C	D
LNAV MDA	860-1	614 (700-1)	860-1¾ 614 (700-1¾)	860-2 614 (700-2)
CIRCLING	860-1	614 (700-1)	900-1¾ 654 (700-1¾)	900-2 654 (700-2)