

WAAS CH 42635 W20A	APP CRS 198°	Rwy Idg TDZE 262 Apt Elev 262
--	------------------------	---

RNAV (GPS) RWY 20

Kennett Meaml (TKX)

RNP APCH-GPS.

NA

NA


NA

NA

Circling to Rwy 18/36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA west of Rwy 2 and 18. When local altimeter setting not received, use Blytheville altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV visibility 1/8 mile all Cats; increase LNAV/VNAV visibility 1/4 mile all Cats; increase LNAV Cat C/D and Circling Cat D visibility 1/4 mile. Rwy 20 helicopter visibility reduction below 3/4 SM NA. VDP and Baro-VNAV NA when using Blytheville Muni altimeter setting.

MISSED APPROACH: Climb to 2500 direct COSAD and hold.

AWOS-3PT 119.05	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

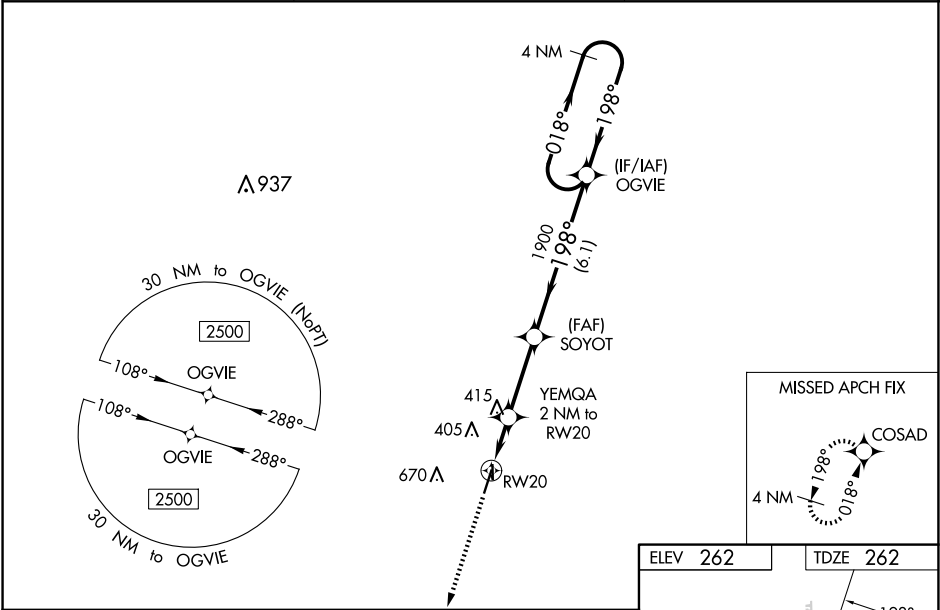

2500

COSAD

YEMQA
2 NM to RW20

SOYOT
1900

OGVIE
4 NM Holding Pattern

*LNAV only.

*1.2 NM to RW20

RW20

920*

1900

2500

GP 3.00°
TCH 40

1.2 NM

0.8 NM

3 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	554-1 292 (300-1)			
LNAV/VNAV DA	602-1 340 (400-1 1/2)			
LNAV MDA	680-1	418 (500-1)	680-1 1/2	418 (500-1 1/2)
CIRCLING	680-1 418 (500-1)	720-1 458 (500-1)	720-1 1/2 458 (500-1 1/2)	900-2 638 (700-2)

