

WAAS CH 65809 W01A	APP CRS 009°	Rwy Idg 4527 TDZE 588 Apt Elev 588
--	------------------------	---

RNAV (GPS) RWY 1
LEBANON MUNI (M54)

RNP APCH - GPS.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. Baro-VNAV and VDP NA when using XNX altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy's 4 and 22. When local altimeter setting not received, use XNX altimeter setting: increase LPV DA to 1121 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1433 feet; increase all MDAs 40 feet and Circling Cat C visibility ½ SM.

MISSED APPROACH:
Climb to 3000 direct LATGE and hold.

AWOS-3 118.325	NASHVILLE APP CON 118.4 360.7	UNICOM 122.725 (CTAF)
--------------------------	---	---------------------------------

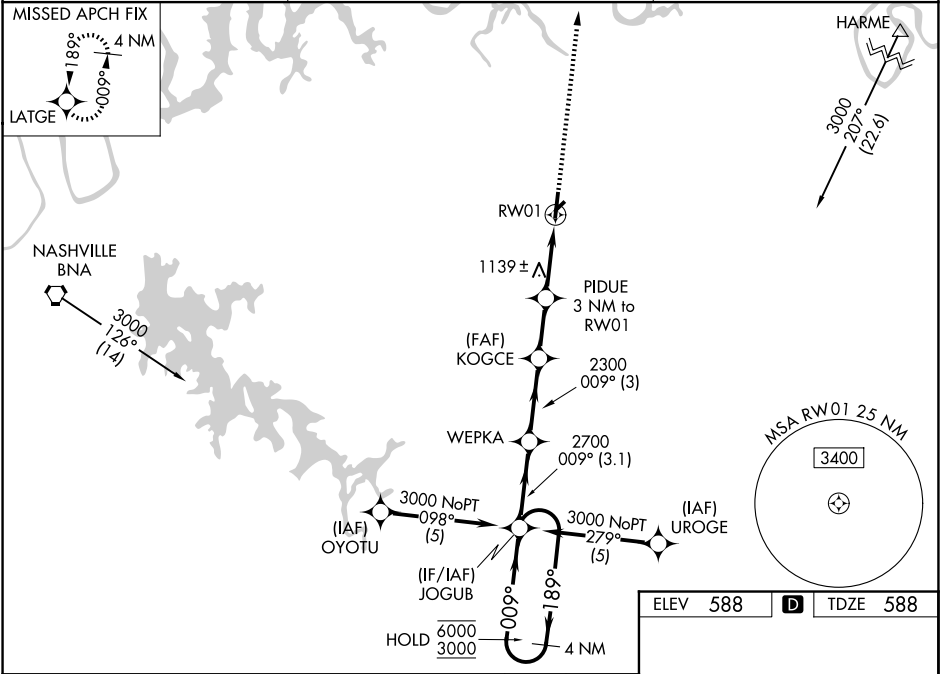

4 NM Holding Pattern JOGUB

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).

3000 LATGE

GP 3.00° TCH 45

6000 ← 189° → 009° → 009°

2700

2300

1580

3.1 NM


3 NM

2.2 NM

0.5 NM

2.5

CATEGORY	A	B	C	D
LPV DA	1088-1⅓ 500 (500-1⅓)			
LNAV/VNAV DA	1400-2½ 812 (900-2½)			
LNAV MDA	1400-1 812 (900-1)	1400-1¼ 812 (900-1¼)	1400-2½ 852 (900-2½)	812 (900-2½) 1520-3 932 (1000-3)
CIRCLING	1400-1¼	812 (900-1¼)		

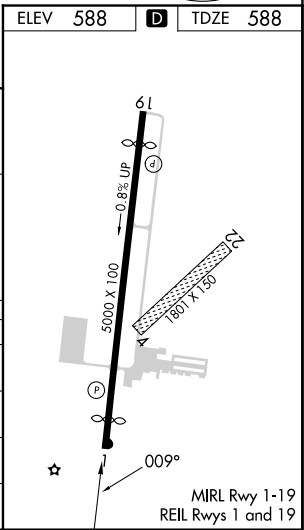

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026