



LOC I-CCO	APP CRS	Rwy Idg	5500
110.75	322°	TDZE	952
		Apt Elev	970

ILS or LOC RWY 33

NEWNAN COWETA COUNTY (CCO)

ADF required.	MALSF	MISSED APPROACH: Climb to 1800 then climbing left turn to 2500 direct EQQ NDB and hold, continue climb-in-hold to 2500.
▼ ▲ Rwy 33 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to S-ILS 33.	✈ ≡	

AWOS-3PT 118.975	ATLANTA APP CON 119.8 354.125	GCO 121.725	UNICOM 122.7 (CTAF) 0
---------------------	----------------------------------	----------------	--------------------------

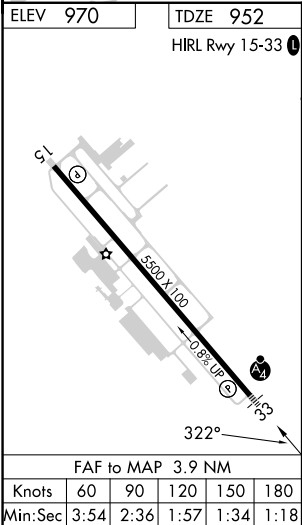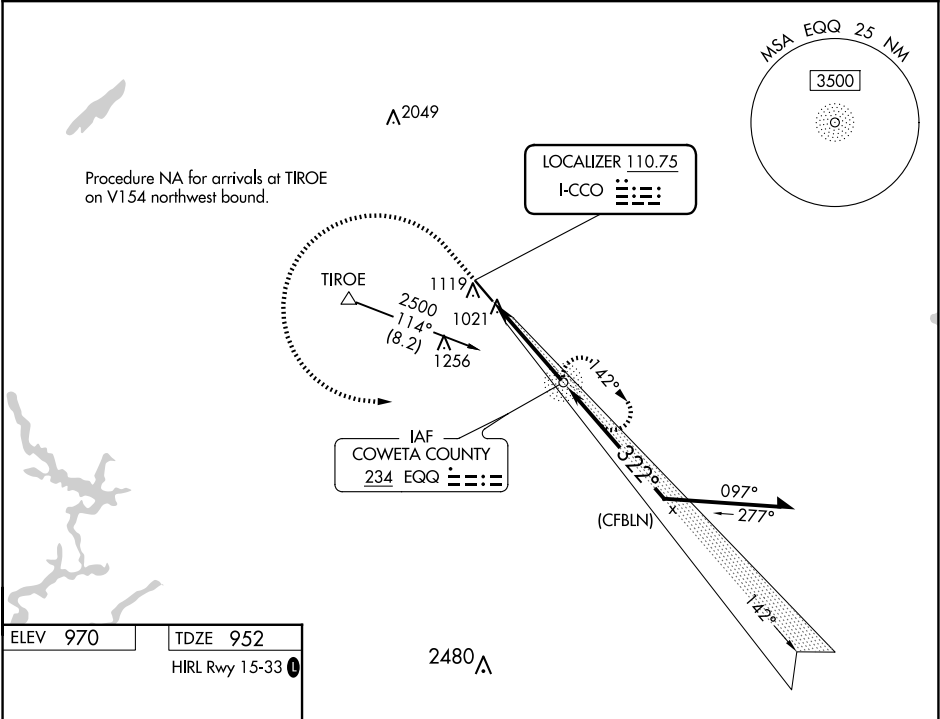

1800	2500	EQQ		
				
EQQ VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49). Remain within 10 NM 2208 142° 322° 2500 2300 3.9 NM GS 3.00° TCH 44				
CATEGORY	A	B	C	D
S-ILS 33	1202-¾ 250 (300-¾)			
S-LOC 33	1340-¾ 388 (400-¾)		1340-⅞ 388 (400-⅞)	
 CIRCLING	1420-1 450 (500-1)		1560-1½ 590 (600-1½)	1560-2 590 (600-2)