


APP CRS
135°

Rwy Ldg
TDZE
Apt Elev
9300
591
606

RNAV (RNP) Z RWY 13R
DALLAS-FORT WORTH INTL (DFW)

RNP AR APCH. RF required.				MALSR	MISSED APPROACH: (Do not exceed 185K until HRNTT) Climb to 3000 on the RNAV missed approach route to SLOTT and hold.	
For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. Missed approach requires RNP less than 1.0.						
D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 133.15 118.1	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC	

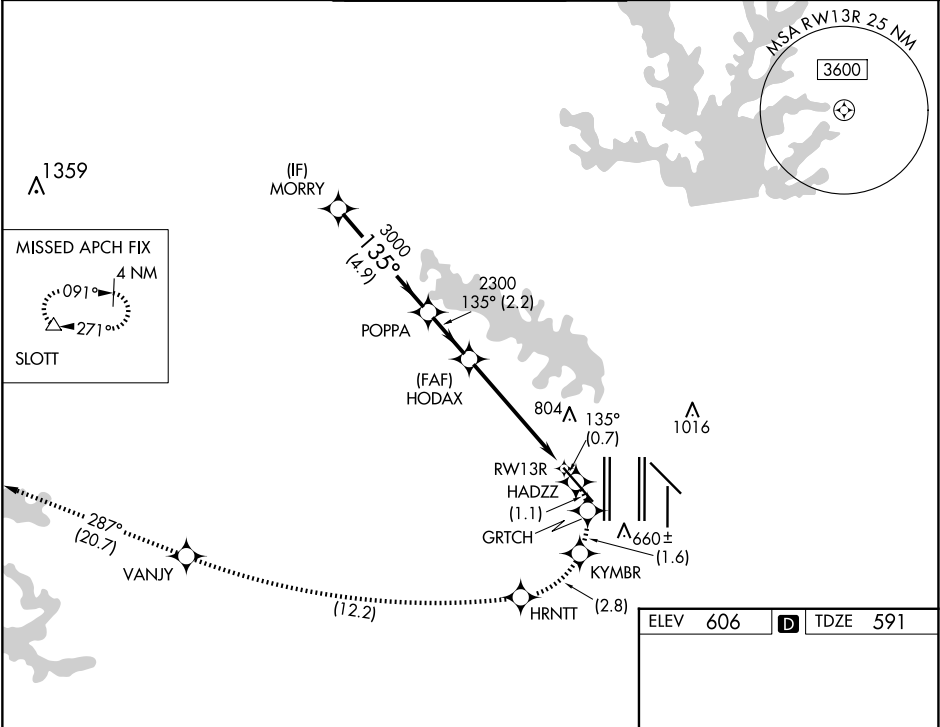

3000	HADZZ	GRCH	KYMBR	HRNTT	VANJY	tr 287°	SLOTT
tr 135°	MORRY	POPPA	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).				
			HODAX				
3000	135°	3000	135°	2300			
GP 3.00°							
TCH 55							
	4.9 NM	2.2 NM	5.2 NM				
CATEGORY	A	B	C	D			
RNP 0.30 DA		1041/45	450 (500-7%)				

AUTHORIZATION REQUIRED

HIRL all Rwys
REIL Rwy 13L and 31L
TDZ/CL all Rwy except 13L and 31L