


WAAS CH 86623 W30A	APP CRS 306°	Rwy Idg TDZE 2456 Apt Elev 2458
--	------------------------	---

RNAV (GPS) RWY 30

DAWSON COMMUNITY (GDV)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 30 helicopter visibility reduction below ¾ SM NA. ▲	MISSED APPROACH: Climb to 6000 direct ACAKO and hold, continue climb-in-hold to 6000.
---	---

AWOS-3PT 135.075	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

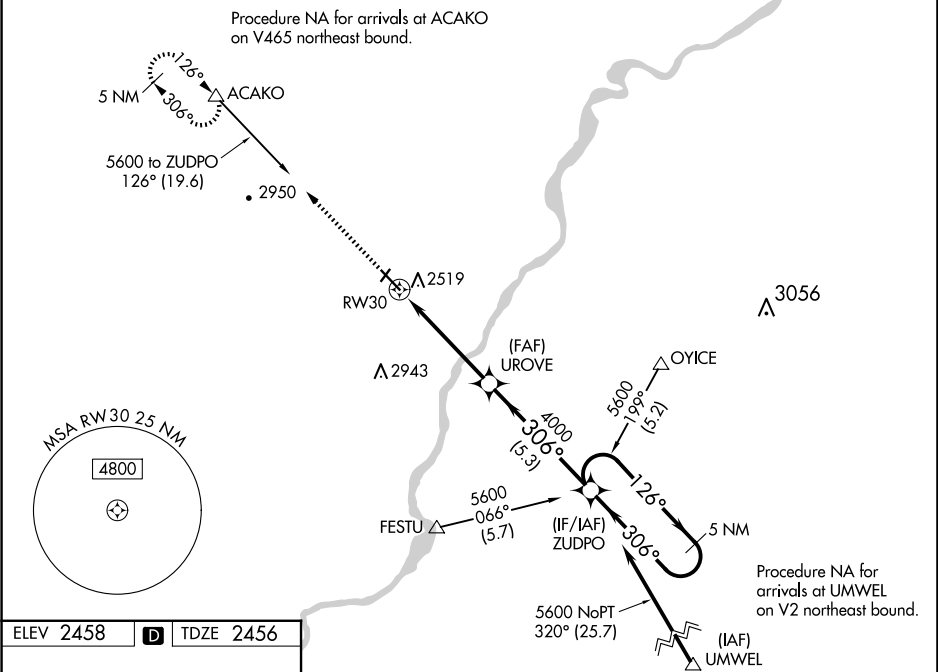

REIL Rwy 12 and 30

MRL Rwy 2-20 and 12-30

6000	ACAKO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).				5 NM Holding Pattern
RW30		UROVE	4000	306°	126°	5600
			4000			GP 3.00° TCH 52
		4.7 NM	5.3 NM			
CATEGORY	A	B	C	D		
LPV DA	2706-1 250 (300-1)					
LNAV/VNAV DA	2706-1 250 (300-1)					
LNAV MDA	2780-1 324 (400-1)					
CIRCLING	2840-1 382 (400-1)	2920-1 462 (500-1)	3280-2½ 822 (900-2½)	3280-2¾ 822 (900-2¾)		