

VORTAC HLI	APP CRS	Rwy Idg	N/A
112.4	094°	TDZE	N/A
Chan 71		Apt Elev	467

VOR/DME-A
RIPLEY (25M)

▼ ▲ NA	Use Corinth altimeter setting; when not received, use Tupelo altimeter setting and increase all MDAs 40 feet, and visibility Cat C ¼ SM. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climbing left turn to 3000 via heading 251° and HLI VORTAC R-094 to HLI VORTAC and hold.
-----------	---	---

CRX AWOS-3PT 118.675	MEMPHIS CENTER 135.9 260.6	UNICOM 122.8 (CTAF) 0
-------------------------	-------------------------------	--------------------------


Procedure NA for arrivals on HLI VORTAC
airway radials 045 CW 112.

IAF
HOLLY SPRINGS
112.4 HLI
Chan 71



(IF) TIERD
HLI 10

NUTTE
HLI 20

MACVE
HLI 23.8



ELEV 467

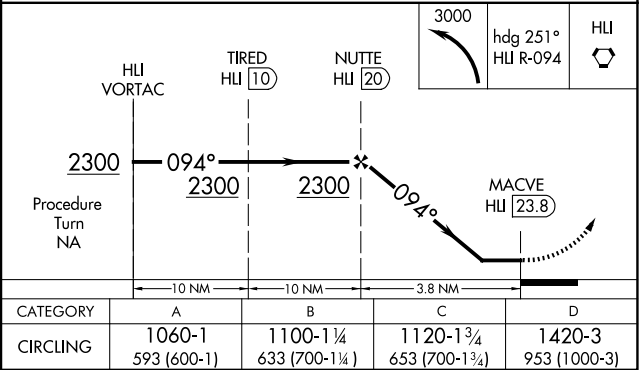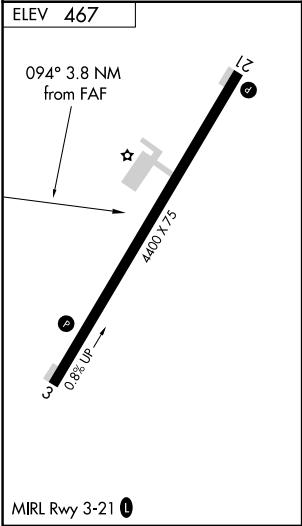

SC-4, 25 DEC 2025 to 22 JAN 2026

SC-4, 25 DEC 2025 to 22 JAN 2026