

VOR RWY 6

VORTAC BZA 116.8 Chgn 115	APCH CRS 048°	Rwy Idg 6043 TDZE 387 Arpt Elev 433
---	-------------------------	--

[USA] LAGUNA AAF (YUMA PROVING GROUND) (KLGF)

RADAR required for holding.

T * Procedure not authorized at night.
A NA ** Circling not authorized NW of rwy 06 and 18.

MISSED APPROACH: Climbing right turn to 3800 direct BZA VORTAC and hold, continue climb-in-hold to 3800.

YUMA APP CON
124.7 371.975

TOWER ★
126.2 (CTAF) 242.175


GND CON
121.8 0 229.4

Helicopter visibility reduction not authorized.

Procedure not authorized when airfield closed.


Unlit road 379' MSL, 314' from threshold.

Obtain local altimeter setting on CTAf.
When not received, use Yuma MCAS Intl altimeter setting.

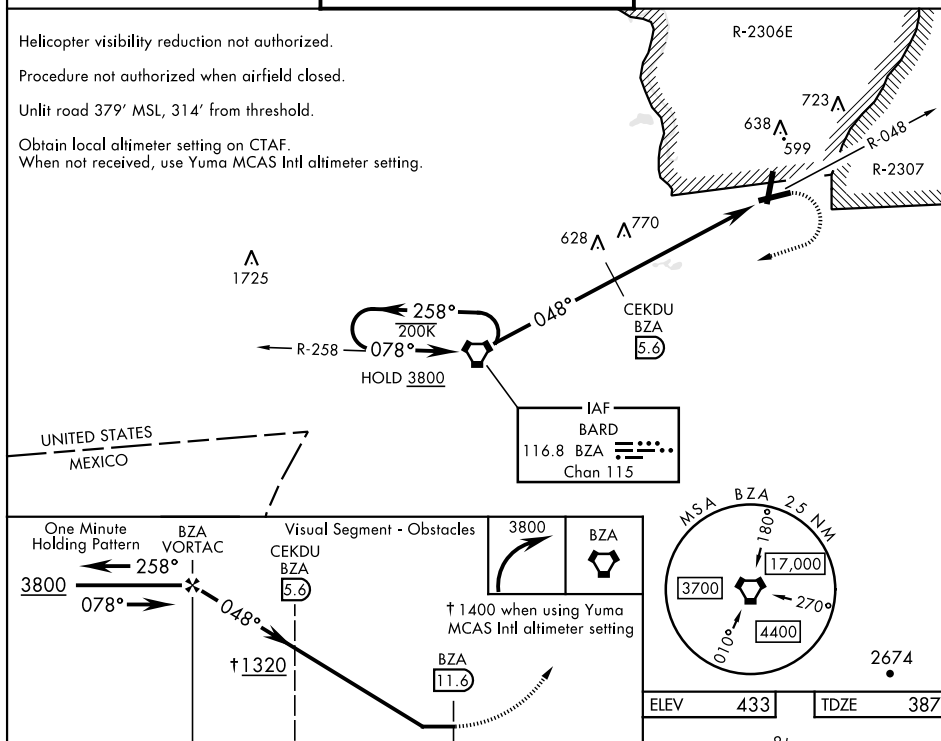

CATEGORY	A	B	C	D
S-6*	1320-1¼ 933 (900-1¼)	1320-2 ½ 933 (900-2½)		
C CIRCLING**	1320-1¼ 887 (900-1¼)	1320-2 ¾ 887 (900-2¾)	1320-3 887 (900-3)	
DME MINIMA				
S-6*	1040-1 653 (700-1)	1040-1 7/8 653 (700-1 7/8)		
C CIRCLING**	1080-1 647 (700-1)	1080-1 7/8 647 (700-1 7/8)	1080-2 647 (700-2)	
YUMA MCAS/YUMA InH ALTIMETER SETTING				
S-6*	1400-1¼ 1013 (1000-1¼)	1400-1½ 1013 (1000-1½)	1400-3 1013 (1000-3)	
C CIRCLING**	1400-1¼ 967 (1000-1¼)	1400-1½ 967 (1000-1½)	1400-3 967 (1000-3)	
YUMA MCAS/YUMA InH ALTIMETER SETTING DME MINIMA				
S-6*	1120-1 733 (700-1)	1120-2 733 (700-2)		
C CIRCLING**	1160-1 727 (800-1)	1160-2 727 (800-2)	1160-2¼ 727 (800-2¼)	

ELEV	433	TDZE	387
------	-----	------	-----



MIRL Rwy 18-36 L

FAF to MAP 11.6 NM					
Knots	60	90	120	150	180
Min:Sec	11:36	7:44	5:48	4:38	3:52