


RADAR required.

NOTE: Chart not to scale.

Rwys 17, 35: NA - Environmental.
Rwys 12, 30: Standard with minimum
climb of 500'/NM to 540.

NOTE: CRGER-TRANSITION ATC assigned only for aircraft departing 54T, AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, TØØ, T41.

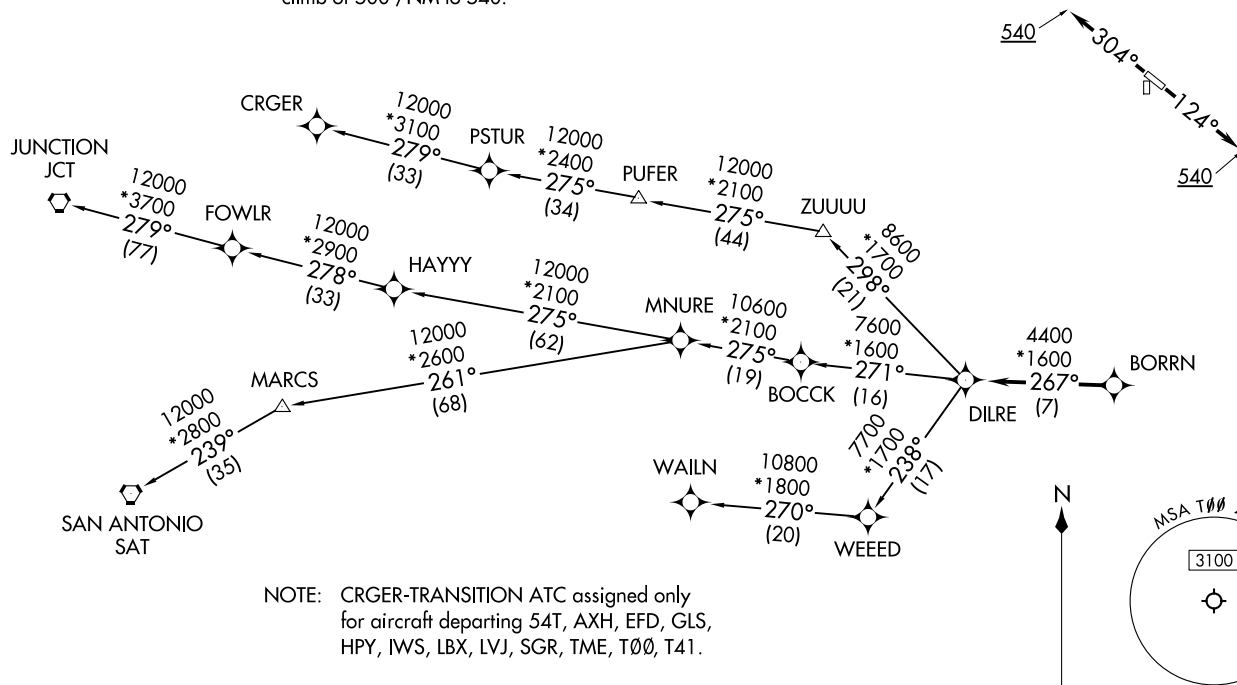

(CONTINUED ON FOLLOWING PAGE)

ANAHUAC, TEXAS
CHAMBERS COUNTY (T000)

CHAMBERS COUNTY (T00)
ANAHUAC, TEXAS

▼	DEPARTURE ROUTE DESCRIPTION
	TAKEOFF RUNWAY 12: Climb on heading 124° to 540, for RADAR vectors to BORRN, thence. . . . TAKEOFF RUNWAY 30: Climb on heading 304° to 540, for RADAR vectors to BORRN, thence.on track 267° to DILRE, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure. CRGER TRANSITION (BORRN6.CRGER) JUNCTION TRANSITION (BORRN6.JCT) MNURE TRANSITION (BORRN6.MNURE) SAN ANTONIO TRANSITION (BORRN6.SAT) WAILN TRANSITION (BORRN6.WAILN)

SC-5, 25 DEC 2025 to 22 JAN 2026

SC-5, 25 DEC 2025 to 22 JAN 2026