


When local altimeter setting not received, use Vernal altimeter setting and increase all MDA 80 feet, FOSLA fix minimums, increase Cat C visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 9000 direct MTU VOR/DME and hold, continue climb-in-hold to 9000.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) 0
--------------------	----------------------------------	--------------------------

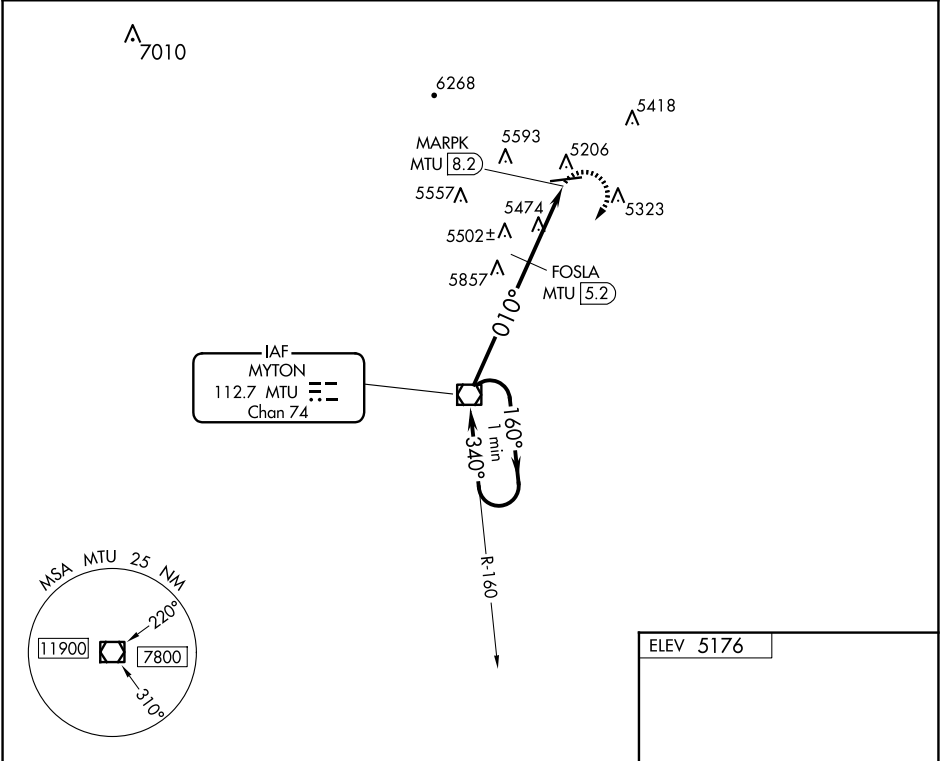

One Minute Holding Pattern

8500

160°

340°

MTU VOR/DME

9000

MTU

6280

010°

FOSLA MTU 5.2

MARPK MTU 8.2

5.2 NM

3 NM

CATEGORY	A	B	C	D
CIRCLING	6280-1¼ 1104 (1200-1¼)	6280-1½ 1104 (1200-1½)	6280-3 1104 (1200-3)	6340-3 1164 (1200-3)
FOSLA FIX MINIMUMS				
CIRCLING	5760-1 584 (600-1)	5900-1 724 (800-1)	6020-2½ 844 (900-2½)	6340-3 1164 (1200-3)

ELEV 5176

6501 X 75

1.0% UP

010°

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0

Knots	60	90	120	150	180
Min:Sec	8:12	5:28	4:06	3:17	2:44