


WAAS CH 72628 W36A	APP CRS 358°	Rwy Idg TDZE 256 Apt Elev 256
--	------------------------	---

RNAV (GPS) RWY 36

JONESBORO (F88)

RNP APCH - GPS. ▼ VDP NA when using Ruston altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet, and LP, LNAV and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 2400 direct FIMUG and hold.
--	---

MNROE APP CON ★ 126.9 307.9	CTAF 122.9 0
---------------------------------------	------------------------

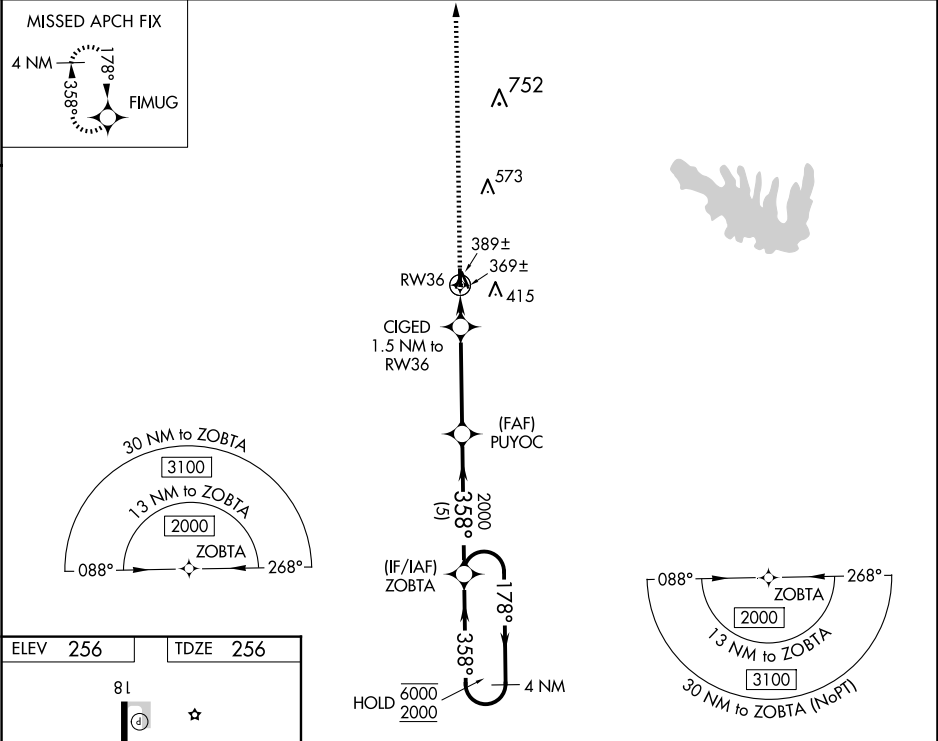

ELEV 256	TDZE 256
2400 ↑ FIMUG	
RW36 1 NM to RW36 CIGED 1.5 NM to RW36 PUYOC ZOBT A 4 NM Holding Pattern 358° 178° 6000 2000 3.00° TCH 50 760 1 NM 0.5 NM 3.8 NM 5 NM	
CATEGORY	A B C D
LP MDA	620-1 364 (400-1) NA
LNAV MDA	640-1 384 (400-1) 640-1½ 384 (400-1½) NA
CIRCLING	780-1 524 (600-1) 880-1¾ 624 (700-1¾) NA