



WAAS CH 42831 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	5003 215 229
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

NAVASOTA MUNI (60R)

RNP APCH-GPS.	MISSED APPROACH: Climb to 3000 direct HOXID and hold.
⚠ Rwy 35 helicopter visibility reduction below ¾ NA. Baro-VNAV and VDP NA when using 11R altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use 11R altimeter setting and increase LPV DA to 515 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 515 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM.	

AWOS-3PT 120.925	HOUSTON APP CON 134.3 360.85	CTAF 122.9	123.3 0
----------------------------	--	----------------------	----------------

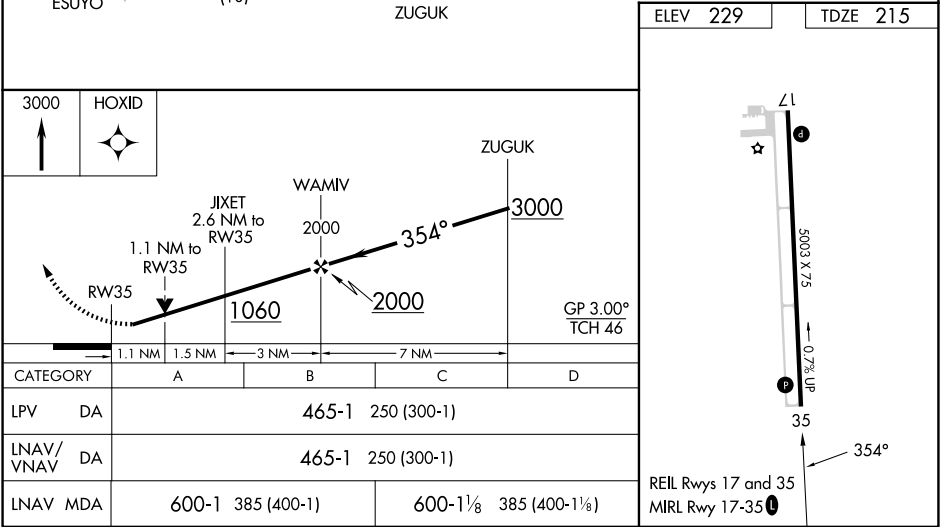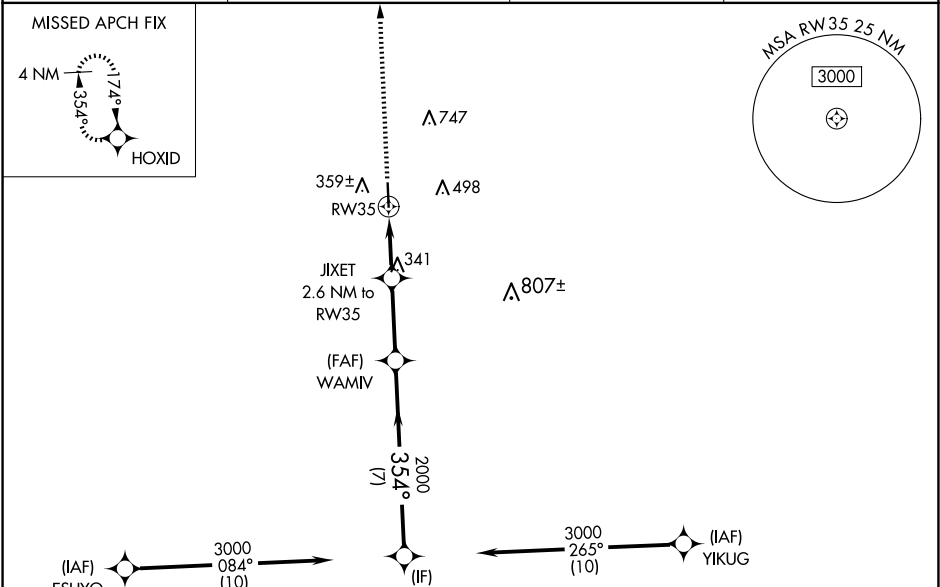

SC-5, 25 DEC 2025 to 22 JAN 2026

SC-5, 25 DEC 2025 to 22 JAN 2026