

WAAS CH 69418 W25A	APP CRS 247°	Rwy Idg TDZE Apt Elev	3434 8 9
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) RWY 25

BEAUFORT EXEC (ARW)


⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beaufort MCAS (Merritt Fld) altimeter setting and increase LPV DA to 226, LNAV/VNAV DA to 352, and all MDA 20 feet. VDP and Baro-VNAV NA when using Beaufort MCAS (Merritt Fld) altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
EROMY and hold.

AWOS-3 119.675	BEAUFORT APP CON★ 125.125 292.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

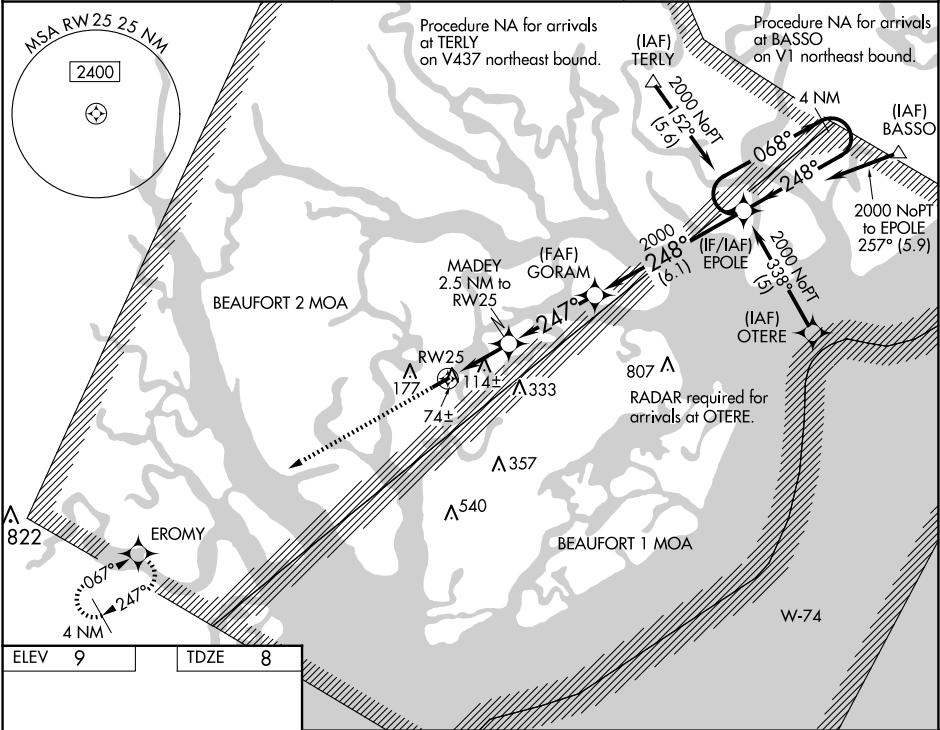

2000

EROMY

247° to RW25

3434 X 75

2000

GORAM

EPOLE

4 NM Holding Pattern

248°

068°

248°

2000

GP 3.00° TCH 40

*LNAV only.

MADEY 2.5 NM to RW25

*1.1 NM to RW25

*840

1.1

1.4

3.5 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA		208-1 200 (200-1)		NA
LNAV/VNAV DA		334-1¼ 326 (400-1¼)		NA
LNAV MDA		380-1 372 (400-1)		NA
CIRCLING	480-1	471 (500-1)	640-1¾ 631 (700-1¾)	NA

REIL Rwy 25
MIRL Rwy 7-25 0

SE-2, 25 DEC 2025 to 22 JAN 2026

SE-2, 25 DEC 2025 to 22 JAN 2026