| WAAS CH 72921 W17A | APP CRS 174° | Rwy ldg 5103<br>TDZE 994<br>Apt Elev 1002 |
|---|---|---|

# RNAV (GPS) RWY 17
## PERRY MUNI (F22)

RNP APCH.

Baro-VNAV NA when using KPNC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When VGSI inop, procedure NA at night. Rwy 17 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet, all MDA 60 feet and increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile.

NA

MISSED APPROACH: Climb to 3000 direct HIGIY and on track 192° to YUPUD and hold.

| KANSAS CITY CENTER | UNICOM |
|---|---|
| 127.8 319.1 | 122.8 (CTAF) L |

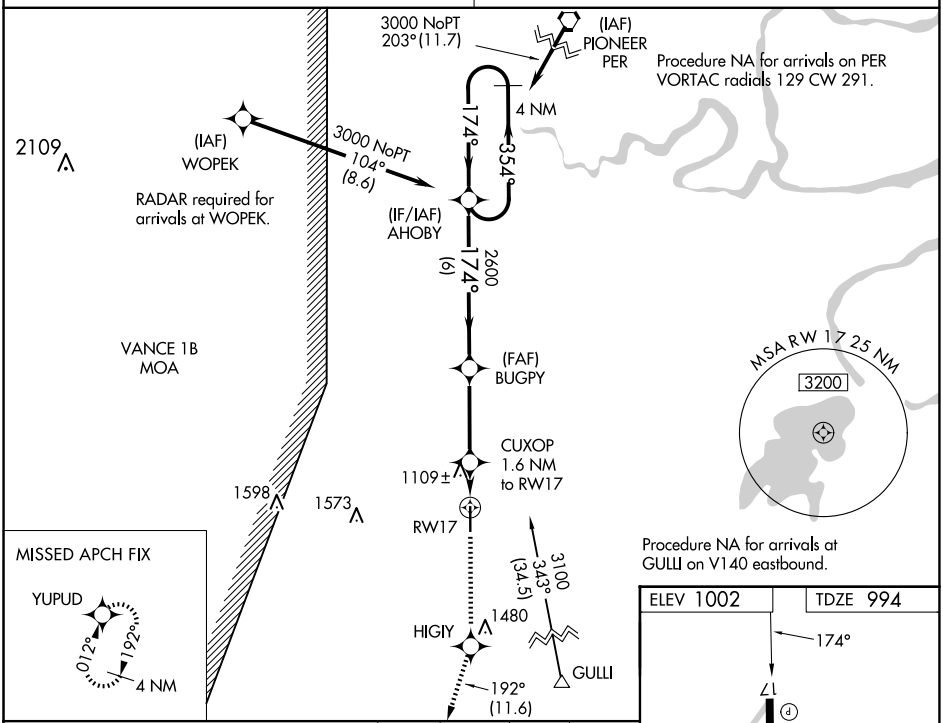


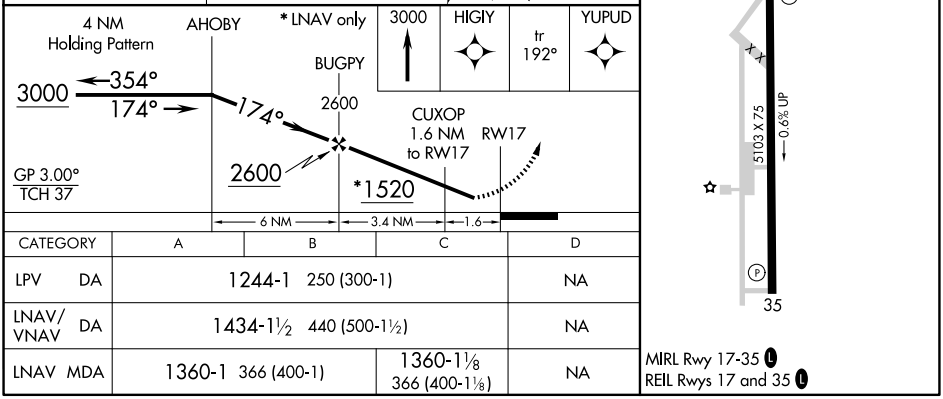


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1244-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1434-1½ 440 (500-1½) | | | NA |
| LNAV MDA | 1360-1 366 (400-1) | | 1360-1⅛ 366 (400-1⅛) | NA |



SC-1, 25 DEC 2025 to 22 JAN 2026
SC-1, 25 DEC 2025 to 22 JAN 2026