


WAAS CH 49113 W35A	APP CRS 349°	Rwy ldg 5498 TDZE 1670 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 35
YORK MUNI (JYR)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV, all LNAV/VNAV, and Cat C LNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.	MISSED APPROACH: Climb to 4000 direct EHJAM and hold.
--	---

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

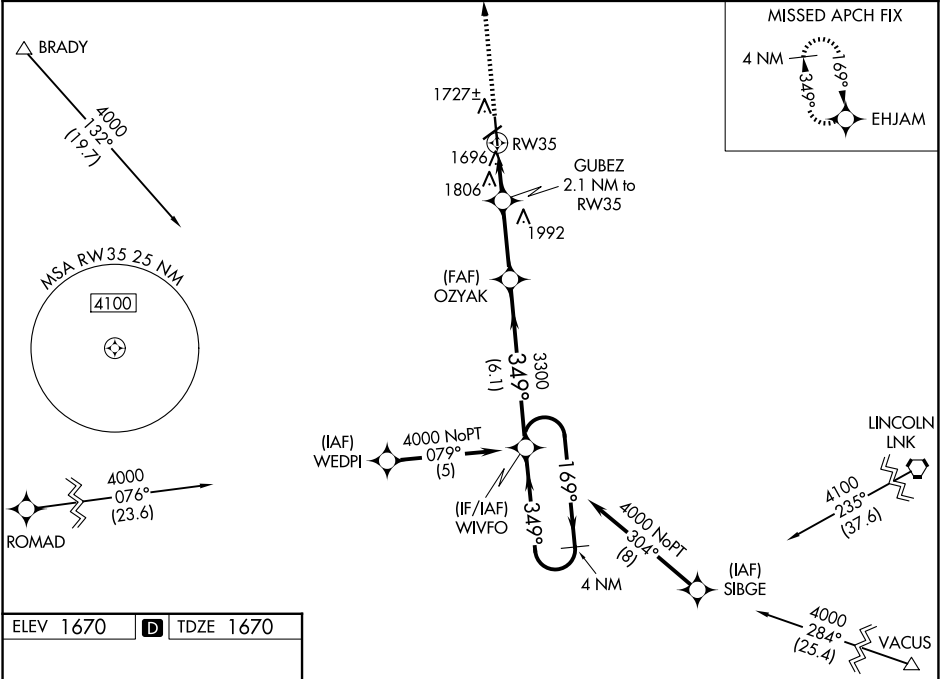

ELEV 1670	D	TDZE 1670
-----------	---	-----------

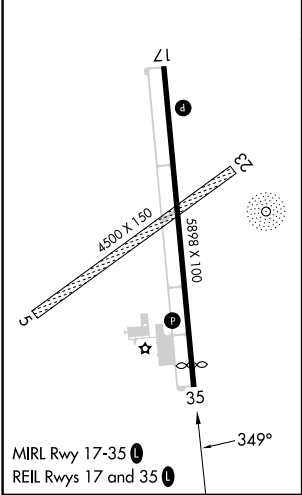

4000	EHJAM	VGSI and RNAV glidepath not coincident (VGSI 3.00/TCH 40).	WIVFO	4 NM Holding Pattern
*LNAV only.	GUBEZ 2.1 NM to RW35	OZYAK	WIVFO	4 NM Holding Pattern
1.2 NM to RW35	2380	3300	4000	GP 3.00° TCH 45
1.2 NM	0.9	2.8 NM	6.1 NM	
CATEGORY	A	B	C	D
LPV DA	1920-¾	250 (300-¾)		NA
LNAV/VNAV DA	2004-1¼	334 (400-1¼)		NA
LNAV MDA	2060-1	390 (400-1)		NA
CIRCLING	2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA

NC-2, 25 DEC 2025 to 22 JAN 2026

NC-2, 25 DEC 2025 to 22 JAN 2026