

RNAV (GPS) RWY 28


JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

T Rwy 28 helicopter visibility reduction below 1 SM NA. Baro-VNAV and VDP NA when using CWV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use CWV altimeter setting.


MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct LOTTS and hold.

JACKSONVILLE CENTER
132.925 363.2


UNICOM
123.0 (CTAF) **L**

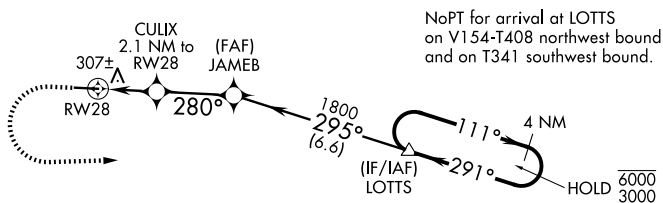

NoPT for arrival at LOTTS
on V154-T408 northwest bound
and on T341 southwest bound.



TDZE 197

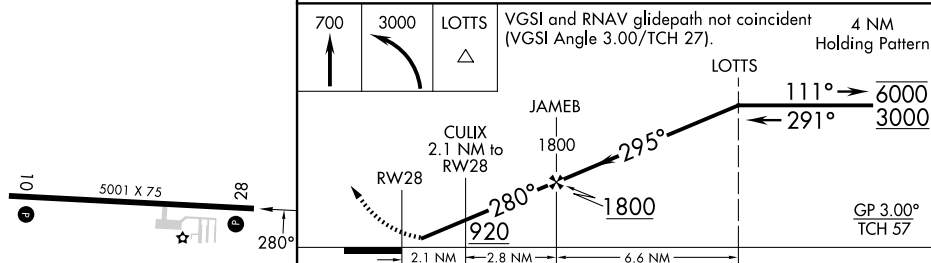

CATEGORY	A	B	C	D
LPV DA	494-1 297 (300-1)			
LNAV/ VNAV DA	527-1 330 (400-1)			
LNAV MDA	620-1 423 (500-1)		620-1¼ 423 (500-1¼)	
CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2½ 863 (900-2½)	1060-2¾ 863 (900-2¾)

MIRL Rwy 10-28 **L**
REIL Rwy 10 **L**

METTER, GEORGIA
Amdt 1A 02OCT25

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)
32°22'N-82°05'W **PNAV (GPS) RWY 28**

RNAV (GPS) RWY 28