



WAAS CH 93838 W27A	APP CRS 270°	Rwy Ldg TDZE Apt Elev	4043 1240 1243
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

CUMBERLAND MUNI (UBE)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3400 direct DESTE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Rice Lake altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1533 feet and LNAV/VNAV DA to 1549 feet and all MDA 60 feet; increase LPV all Cats visibility and LNAV Cat C/D visibility ½ mile; increase Circling Cat D visibility ¼ mile. Circling Rwy 18, 36 NA at night.	

AWOS-3PT 119.175	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

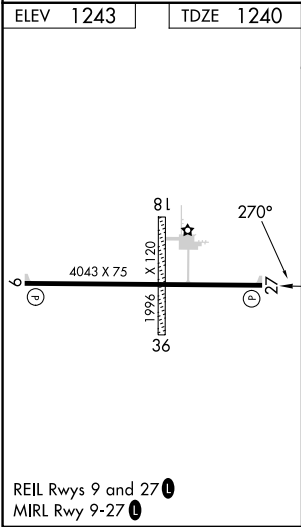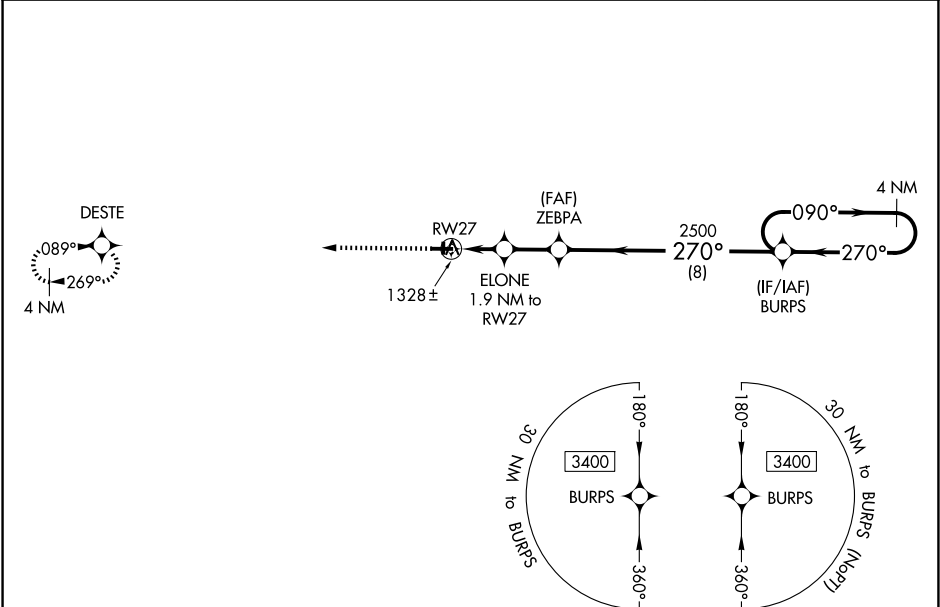

3400 DESTE		4 NM Holding Pattern	
RW27		ELONE 1.9 NM to RW27	ZEBPA 2500
1 NM to RW27		1860	2500
1 NM		0.9 NM	2 NM
CATEGORY		A	B
LPV DA		1490-1	250 (300-1)
LNAV/VNAV DA		1506-1	266 (300-1)
LNAV MDA		1580-1	340 (400-1)
CIRCLING		1640-1 397 (400-1)	1940-1 697 (700-1)
		1940-2 697 (700-2)	1980-2 ¼ 737 (800-2 ¼)