

WAAS CH 78325 W02A	APP CRS 018°	Rwy Ldg TDZE Apt Elev	6001 484 501
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

JOHN C TUNE (JWN)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA E of Rwy 2-20. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase all DAs 39 feet and all MDAs 40 feet; increase LPV visibility all Cats ¼ SM, LNAV visibility Cat B ¼ SM.

MISSED APPROACH:
Climb to 3000 direct BICOL and hold.

ATIS 127.075	NASHVILLE APP CON 119.35 372.0	JOHN TUNE TOWER★ 119.45 (CTAF)	GND CON 121.7	UNICOM 122.7
------------------------	--	--	-------------------------	------------------------

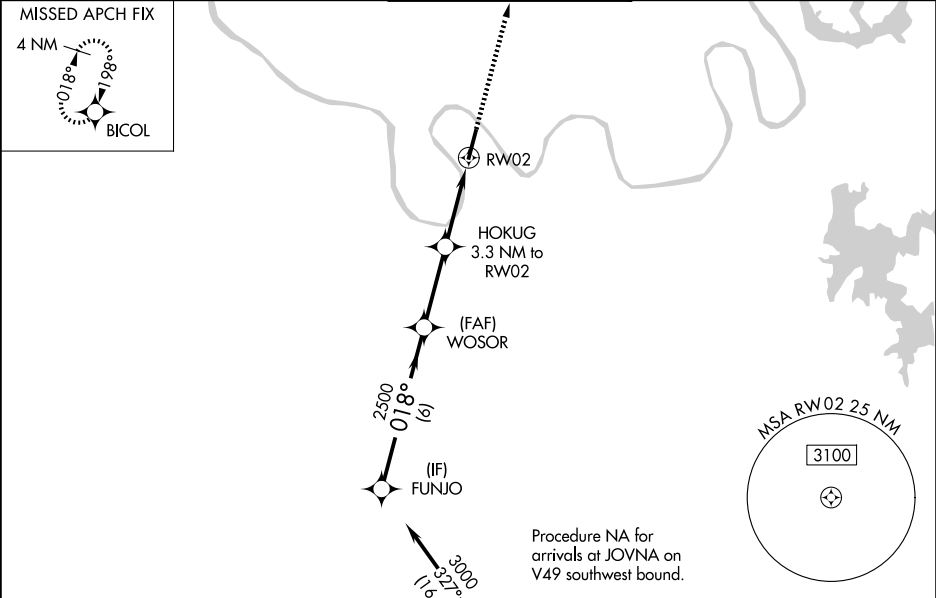

ELEV 501

TDZE 484

FUNJO

3000

018°

2500

WOSOR

2500

HOKUG

3.3 NM to RW02

* 2.1 NM to RW02

RW02

GP 3.00°
TCH 40

6 NM

3 NM

1.2 NM

2.1 NM

3000

BICOL

* LNAV only.

CATEGORY	A	B	C	D
LPV DA	734-7⁄8		250 (300-7⁄8)	
LNAV/VNAV DA	1079-2 1⁄2		595 (600-2 1⁄2)	
LNAV MDA	1160-1	676 (700-1)	1160-2	676 (700-2)
CIRCLING	1200-1	699 (700-1)	1340-2 3⁄4	839 (900-2 3⁄4)

02

4001 x 100

TWR

0.2% UP

018°

MIRL Rwy 2-20

REIL Rwys 2 and 20