

WAAS CH 86708 W06A	APP CRS 060°	Rwy Ldg TDZE Apt Elev 5000 657 666
--	------------------------	--


RNAV (GPS) RWY 6

PONTIAC MUNI (PNT)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1339 feet and all visibilities 1 SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM. Visibility reduction by helicopters NA.

MISSED APPROACH:
Climb to 3000 direct
KEJDO and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

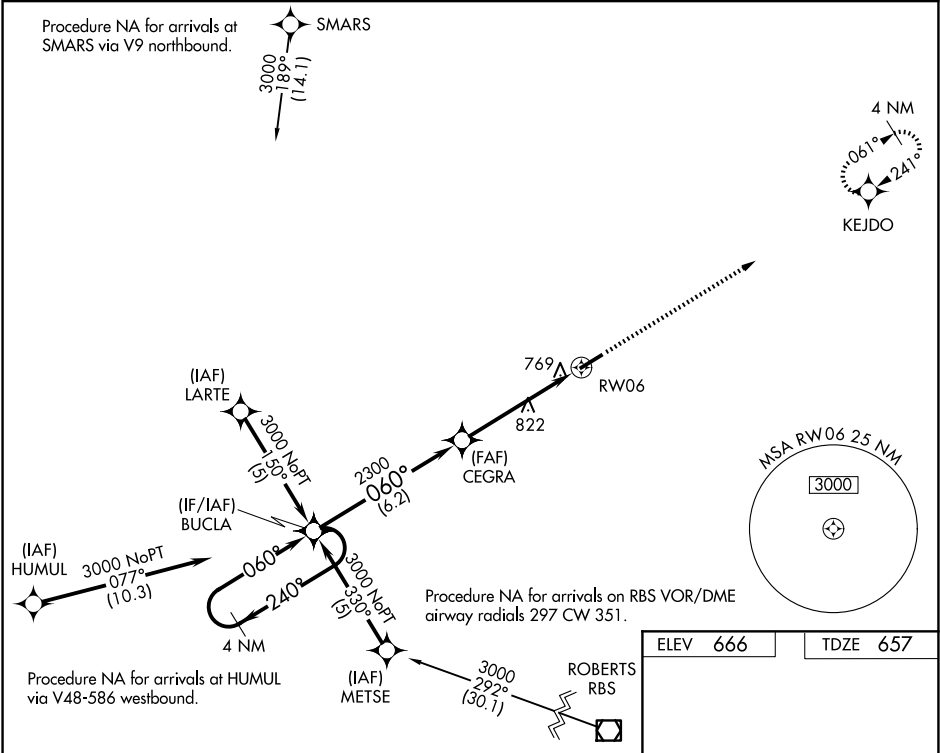

4 NM
Holding Pattern

BUCLA

3000

240°

060°

GP 3.00°
TCH 40

CEGRA

2300

060°

2300

6.2 NM

3.8 NM

1.2

* 1.2 NM to
RW06

* LNAV only.

3000

KEJDO

060°

0.3% UP

5000 X75

CATEGORY	A	B	C	D
LPV DA	1040-1½	383 (400-1½)	NA	NA
LNAV/ VNAV DA	1071-1½	414 (500-1½)	NA	NA
LNAV MDA	1080-1	423 (500-1)	1080-1¼ 423 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

MIRL Rwy 6-24 1

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026