

RNP APCH - GPS.

DME or RADAR required.

▼



▲

For inop ALS, increase S-LOC 30 Cats C, D visibility to 1 SM.

MALSRR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2600 direct SINFO and hold.

AWOS-3 133,975	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.8 (CTAF) ①
-------------------	----------------------------------	--------------------------

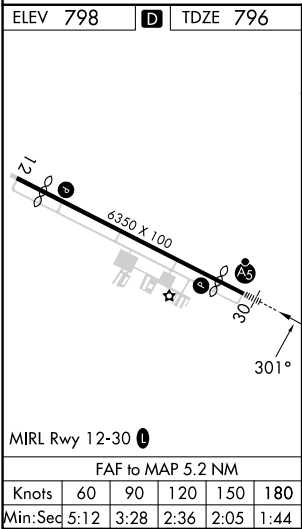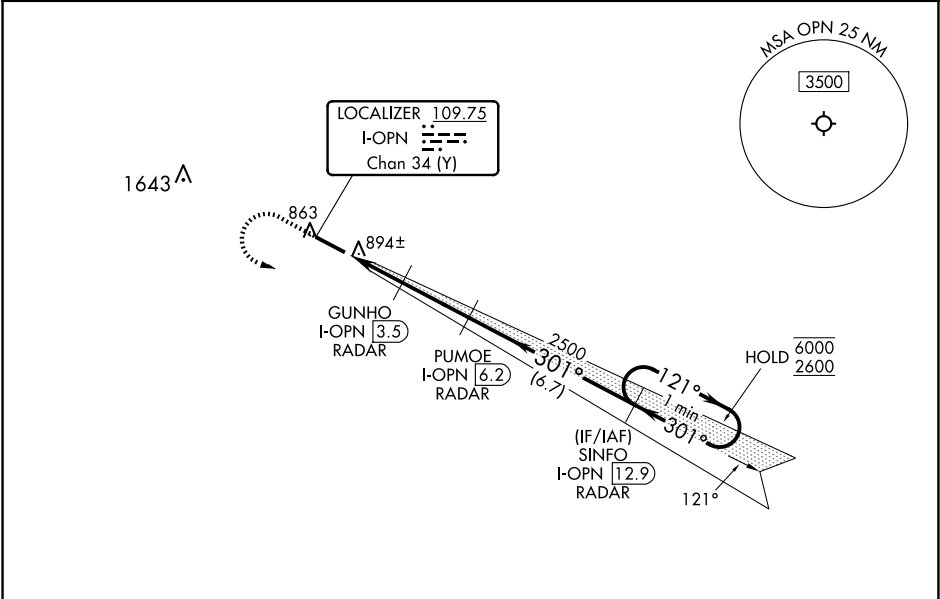

1500	2600	SINFO I-OPN 12.9	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 27).		One Minute Holding Pattern	
		PUMOE I-OPN 6.2 RADAR	SINFO I-OPN 12.9 RADAR	121°	6000	2600
		GUNHO I-OPN 3.5 RADAR	2500	301°	2500	
		I-OPN 1	I-OPN 2.1	1640	GS 3.00°	TCH 50
		1.1 NM	1.4 NM	2.7 NM	6.7 NM	
CATEGORY	A	B	C	D		
S-ILS 30	1016-1/2		220 (300-1/2)			
S-LOC 30	1160-1/2		364 (400-1/2)		1160-5/8 364 (400-5/8)	
CIRCLING	1240-1 442 (500-1)		1260-1 462 (500-1)		1260-1 1/2 462 (500-1 1/2)	
					1680-3 882 (900-3)	