WAAS	APP CRS		
CH **97636**	**148°**	Rwy Idg	**3296**
W14A		TDZE	**1242**
		Apt Elev	**1242**

RNAV (GPS) RWY 14

SAUK CENTRE MUNI (D39)

RNP APCH -GPS.

T A Baro-VNAV NA when using Glenwood altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C . VDP NA with Glenwood altimeter setting. When local altimeter setting not received, use Glenwood altimeter setting and increase all DA/MDA 60 feet, increase LNAV/VNAV all Cats visibility ⅛ mile. Rwy 14 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 8 and 26.

MISSED APPROACH: Climb to 3000 direct VOCAB and hold.

AWOS-3	MINNEAPOLIS CENTER	CTAF
118.475	**126.1 269.2**	**122.9** L

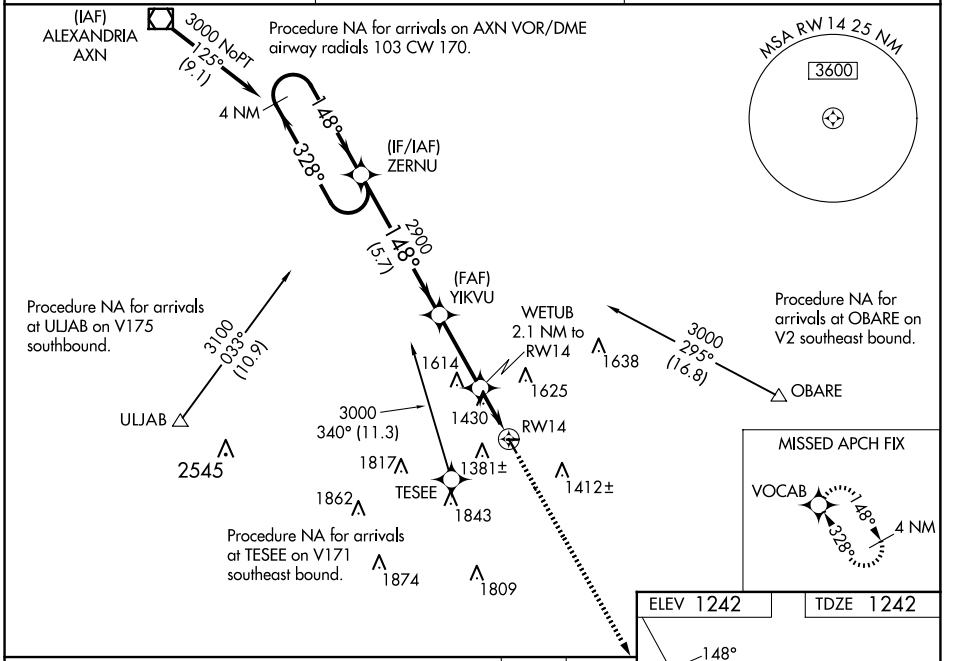

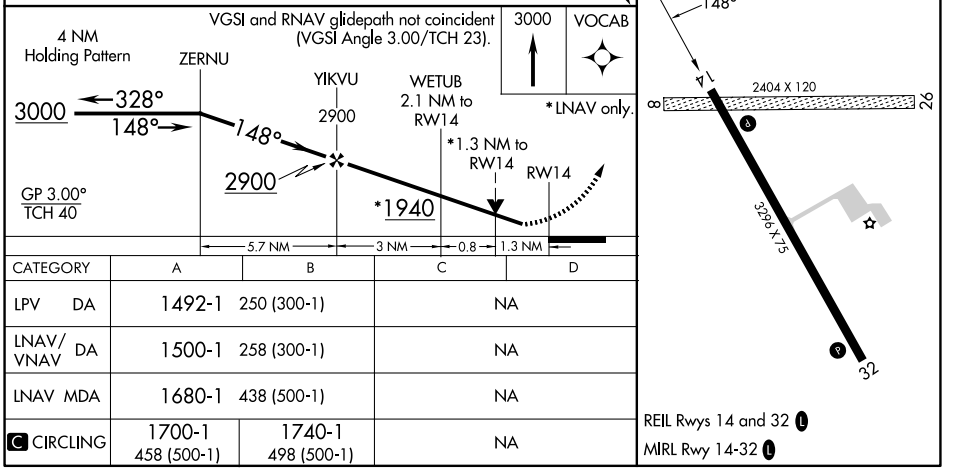

CATEGORY	A	B	C	D
LPV DA	1492-1	250 (300-1)	NA	
LNAV/VNAV DA	1500-1	258 (300-1)	NA	
LNAV MDA	1680-1	438 (500-1)	NA	
C CIRCLING	1700-1 458 (500-1)	1740-1 498 (500-1)	NA	

NC-1, 25 DEC 2025 to 22 JAN 2026
NC-1, 25 DEC 2025 to 22 JAN 2026