


LOC/DME I-FBS <u>111.55</u> Chan 52(Y)	APP CRS 339°	Rwy Ldg 8800 TDZE 1273 Apt Elev 1288
--	------------------------	---

ILS or LOC RWY 34R
NORTHWEST ARKANSAS NTL (XNA)

DME or RADAR required for LOC only.		MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 3400 on heading 163° and RZC VORTAC R-204 to LNDYSY INT/1-FBS 12.9 DME/RADAR and hold.	
▼ For inop ALS, increase S-ILS 34R Cat E visibility to RVR 4000 and S-LOC 34R Cats C/D/E visibility to RVR 5500. ▲ *RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 119.425	RAZORBACK APP CON ★ 121.0 244.575	NORTHWEST ARKANSAS NTL TOWER ★ 127.1 (CTAF) 0	GND CON 121.9	

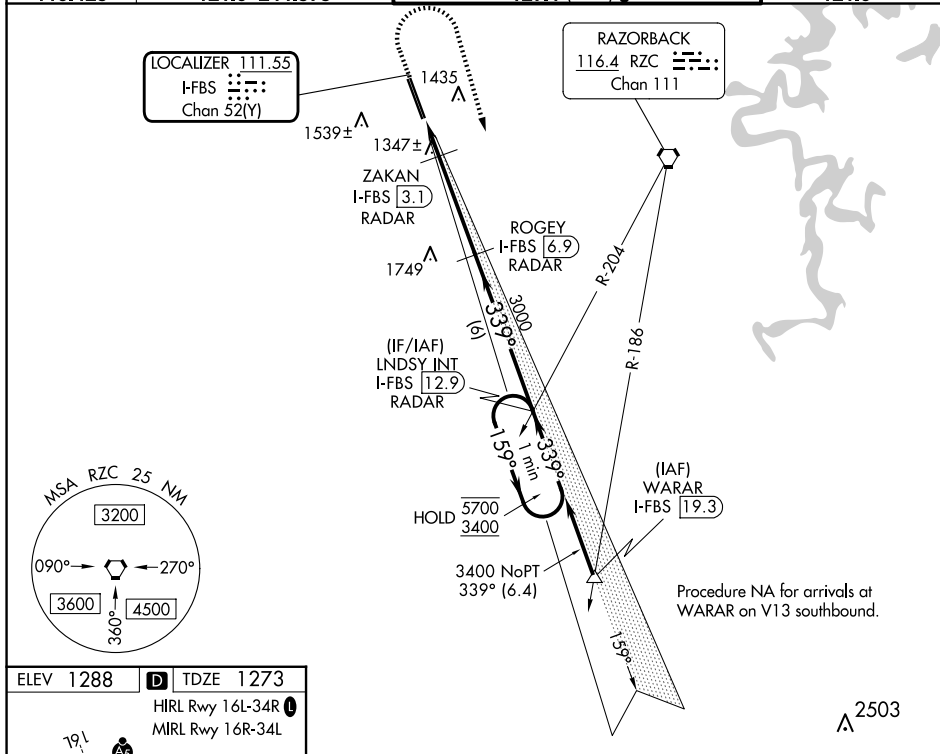

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

1800 ↑	3400 hdg 163°	RZC R-204	LNSY INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 51).				
				One Minute Holding Pattern				
CATEGORY	A		B		C		D	E
S-ILS 34R*	1473/24 200 (200-1/2)							
S-LOC 34R	1620/24 347 (400-1/2)				1620/30 347 (400-5/8)			
CIRCLING	1740-1 452 (500-1)	1760-1 472 (500-1)	2040-2 1/4 752 (800-2 1/4)	2080-2 1/2 792 (800-2 1/2)	2080-2 3/4 792 (800-2 3/4)			