


APP CRS	Rwy Ldg	5032
309°	TDZE	5723
	Apt Elev	5737

RNAV (GPS) RWY 31

ESCALANTE MUNI (1L7)

RNP APCH - GPS.	MISSED APPROACH: Climb to 7600 then climbing left turn to 9500 direct UVCEH and hold, continue climb-in-hold to 9500. *Missed approach requires minimum climb of 328 feet per NM to 8000. #Missed approach requires minimum climb of 320 feet per NM to 8020.
Baro-VNAV NA. Rwy 31 helicopter visibility reduction below ¾ SM NA. Circling NA northeast of Rwy 13-31. Procedure NA at night. Use PGA altimeter setting.	

PGA ASOS 120.625	SALT LAKE CENTER 133.6 269.25	UNICOM 122.8 (CTAF) 0
---------------------	----------------------------------	--------------------------

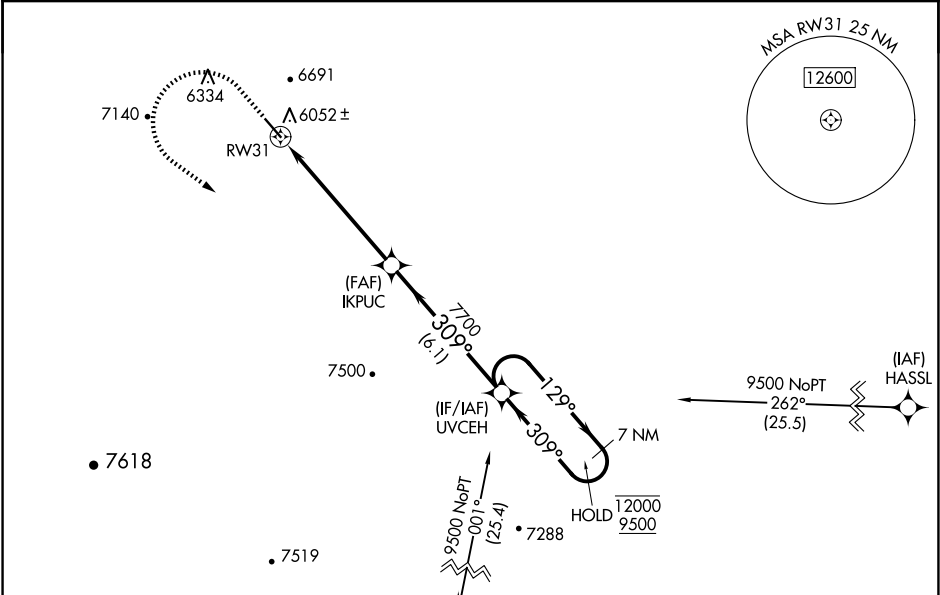

ELEV 5737	TDZE 5723				
7600	9500	UVCEH			
IKPUC		UVCEH	7 NM Holding Pattern		
RW31		7700	129° 12000		
		7700	309° 9500		
		6.1 NM	6.1 NM		
CATEGORY	A	B	C	D	
LNAV/VNAV DA*	6534-2½	811 (800-2½)	NA		
LNAV MDA#	6840-1¼ 1117 (1200-1¼)	6840-1½ 1117 (1200-1½)	NA		
LNAV/VNAV DA	7169-6	1446 (1500-6)	NA		
LNAV MDA	7280-1¼ 1557 (1600-1¼)	7280-1½ 1557 (1600-1½)	NA		
CIRCLING	7280-1¼ 1543 (1600-1¼)	7280-1½ 1543 (1600-1½)	NA		