

WAAS
CH **81936**
W01A

APP CRS
007°

Rwy Ldg **4199**
TDZE **492**
Apt Elev **492**

RNAV (GPS) RWY 1
FINGER LAKES RGNL (ØG7)

▼


⚠

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Syracuse altimeter setting and increase all DA 86 feet and all visibility ¼ SM, increase all MDA 100 feet.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3900 direct HADCI and hold, continue climb-hold to 3900.

AWOS-3 120.0	SYRACUSE APP CON 126.125 269.125	ROCHESTER APP CON 119.55 269.6 (W-NW)	ELMIRA APP CON ★ 124.3 257.8 (SW-SE)	UNICOM 122.8 (CTAF) Ø
------------------------	--	---	--	--

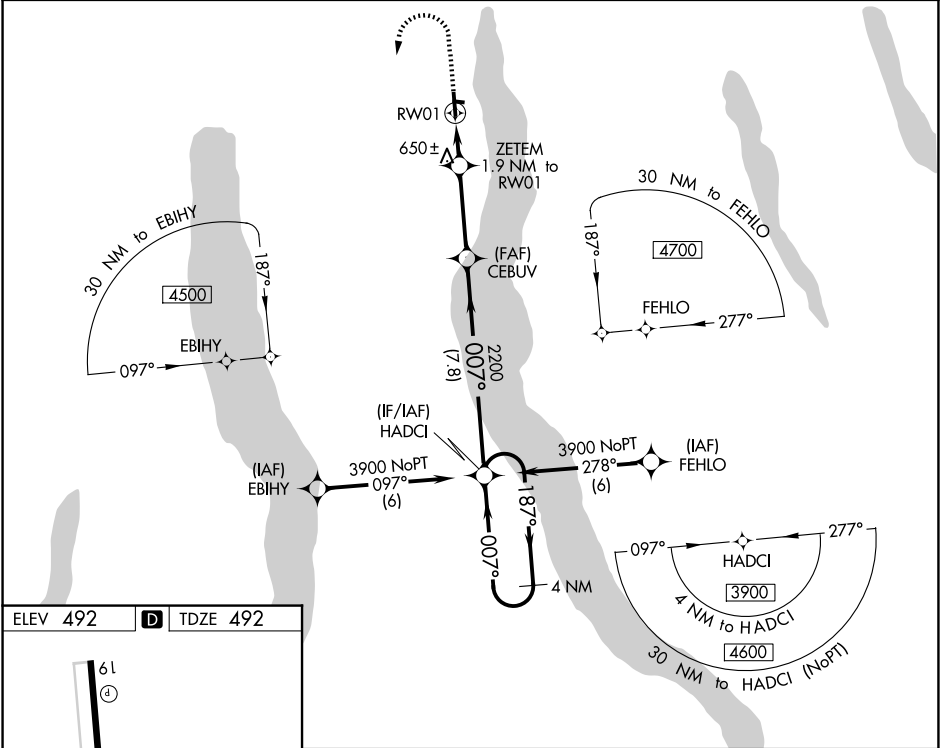

ELEV **492**

D

TDZE **492**

1000	3900	HADCI	HADCI 4 NM Holding Pattern	
* LNAV only		ZETEM 2200	GP 3.00° TCH 40	
* 1.2 NM to 1.9 NM to RW01		CEBUV 2200	187° → 3900	
RW01		1120	← 007°	
1.2 NM		0.7 NM	3.3 NM	
7.8 NM				
CATEGORY	A	B	C	D
LPV DA	742-7/8	250 (300-7/8)	NA	
LNAV/VNAV DA	959-15/8	467 (500-15/8)	NA	
LNAV MDA	900-1	408 (500-1)	NA	
CIRCLING	980-1 488 (500-1)	1180-1 688 (700-1)	NA	