

WAAS CH 65700 W27A	APP CRS 275°	Rwy Ldg TDZE 999 Apt Elev 1026
--	------------------------	--




RNAV (GPS) RWY 27L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 26R or 26L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

CLNC DEL 118.1	CPDLC
-----------------------------	-------



ELEV 1026	D	TDZE 999
------------------	----------	-----------------

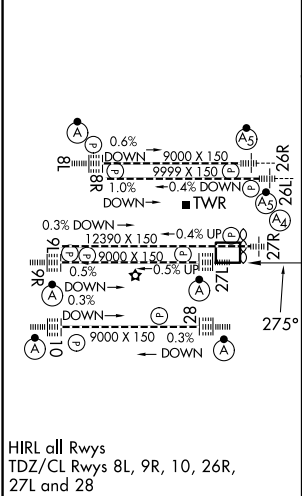

RADAR REQUIRED

4000	CALUP	tr 272°	TEMPO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).	SLVAA
*LNAV only.					
RWY 27L 1.7 NM to DEPOT 2800 GRMPI SEJAY ROMMM 275° 7000					
GP 3.00° TCH 58					
→ 1.7 NM 3.8 NM 4.7 NM 3.8 NM 3.5 NM 3.5 NM					
CATEGORY	A	B	C	D	
LPV DA	1199/18 200 (200-½)				
LNAV/VNAV DA	1528-1⅔ 529 (600-1⅔)				
LNAV MDA	1620/24	621 (600-½)	1620-1⅔	621 (600-1⅔)	