

LOC I-0XK 109.9	APP CRS 139°	Rwy Ldg 8006 TDZE 459 Apt Elev 459
---------------------------	------------------------	---

ILS or LOC RWY 14R
SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


T For inop ALS, increase S-ILS 14R Cat E visibility to RVR 4000 and S-LOC 14R Cat E visibility to 1 3/4 mile. DME from SKE TACAN. DME use requires simultaneous reception of I-OKX and SKE DME.
A * RVR 1800 authorized with use of FD or AP or HUD to DA.
ASR

ALSF-1



MISSED APPROACH: Climb to 2200 then on TOY VORTAC R-148 to WOMUG INT/TOY 25.6 DME and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

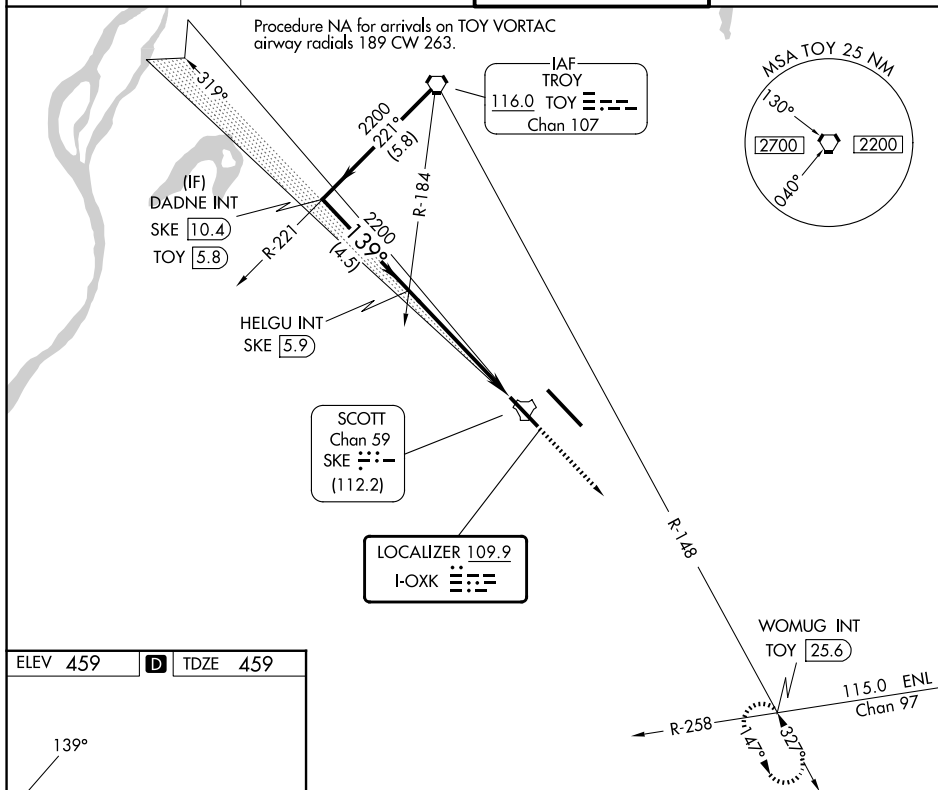

HIRL Rwys 14L-32R and 14R-32L
REIL Rwy 14L

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

DADNE INT SKE 10.4		HELGU INT SKE 5.9		2200 	TOY R-148	WOMUG INT
GS 3.00° TCH 51						
A		B		C		E
CATEGORY	S-ILS 14R *					
S-LOC 14R	1040/24 581 (600-½)			1040-1¼ 581 (600-1¼)		
CIRCLING	1040-1 581 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)	