

LOC I-JDU 111.15	APP CRS 319°	Rwy Ldg 10000 TDZE 442 Apt Elev 459
----------------------------	------------------------	--

ILS or LOC RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

▼

ASR


For inop ALS, increase S-ILS 32R Cat E visibility to RVR 4000 and increase S-LOC Cat E visibility to RVR 5000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

AS

MISSED APPROACH: Climb to 1500 then climbing right turn to 2400 on heading 194° and TOY VORTAC R-144 to EGNOC INT and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

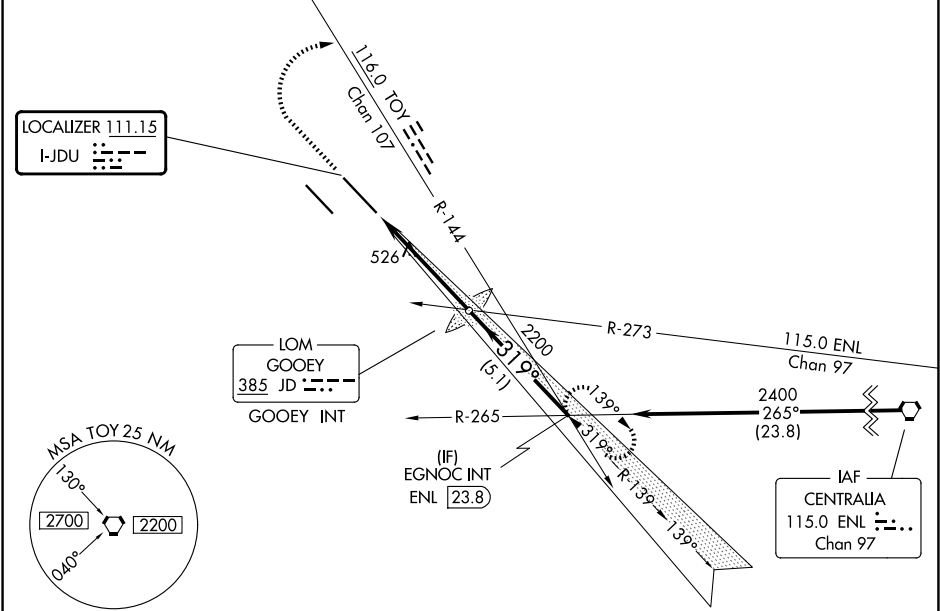

ELEV 459	D	TDZE 442
-----------------	----------	-----------------

